
HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°C to +105°C


Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA9T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

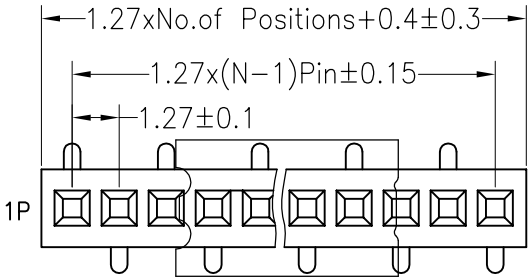


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

TYPE02

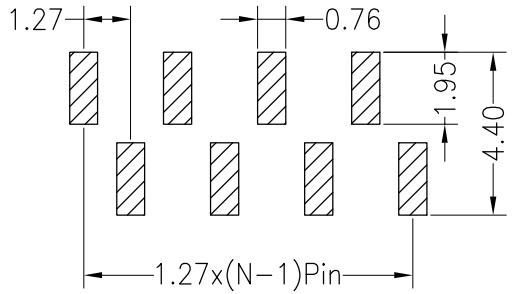

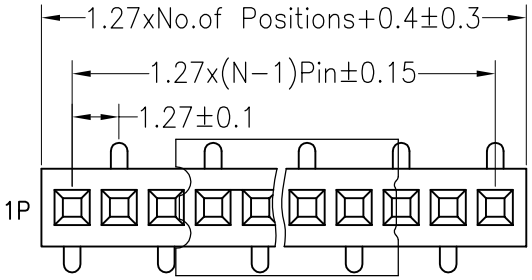


TYPE01

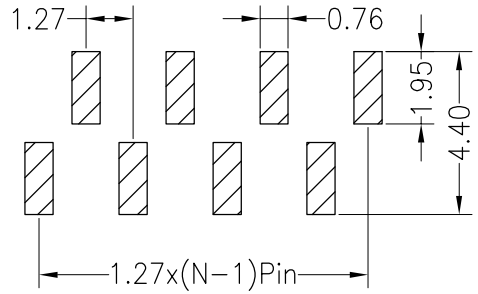


Ordering Information

2434 01 XX X N XX M O X 0X(1,2)

- No.of Pins: 1*2~1*50
- Insulator Material Option: A=BK−PBT, C=BK−PA6T, D=BK−PA46, E=BK−PA9T, F=BK−LCP
- Contact Plating: G0:Gold Flash, G1:3U" Gold, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin
- Packing: T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

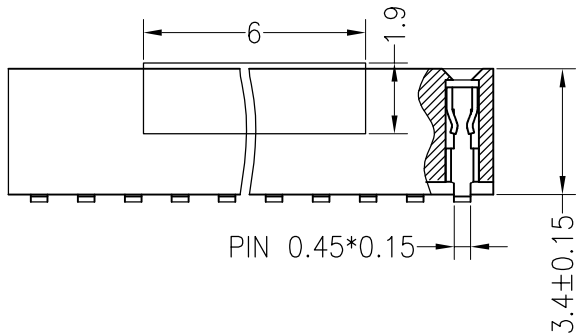

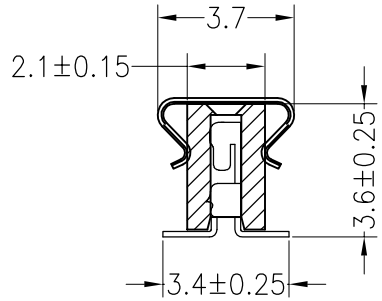

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018.08.03	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	18.08.03
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	243401XXXNXXMOX0X(1,2)
TITLE:	1.27PF 1xNPin H3.4 SMT O−Type