
HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

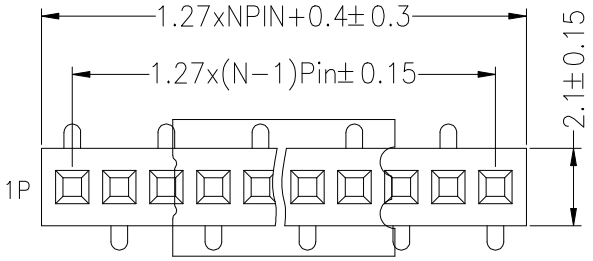


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

TYPE02

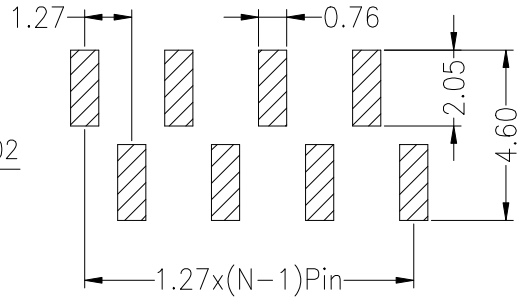

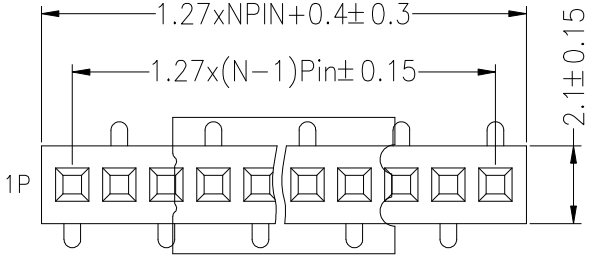


TYPE01

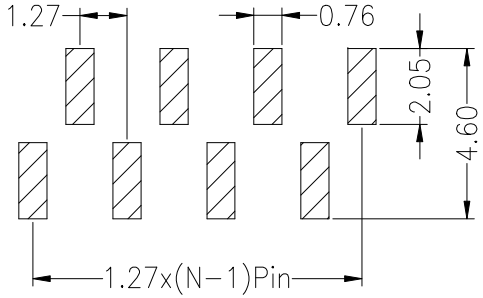


Ordering Information

2434 01 XX X N XX M U X 0X

- No.of Pins Per Row 2−50
- Insulator Material Option: C=BK−PA6T; E=BK−PA9T; F=BK−LCP
- Contact Plating: G1:Gold Flash; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; G6:10U" Gold; G7:15U" Gold; S0:Gold Flash/Tin; SN:Tin
- Packing: A=Tray; T=Tube; P=Tube+Cap; R=Reel+Cap; M=Reel+Mylar

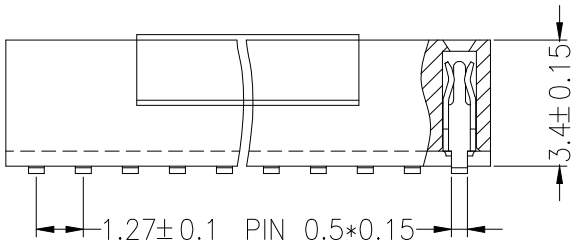



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.09.14	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW: Liu Miao 12.09.14
CHECK
APPROVE

SCALE: FIT
UNIT: mm
SIZE: A4
SHEET: 1/1
PROJ.:

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO. 243401XXXNXXMUX0X
TITLE: 1.27PF 1xNPin H3.4 SMT