







SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

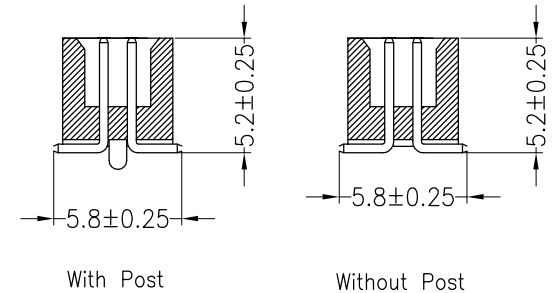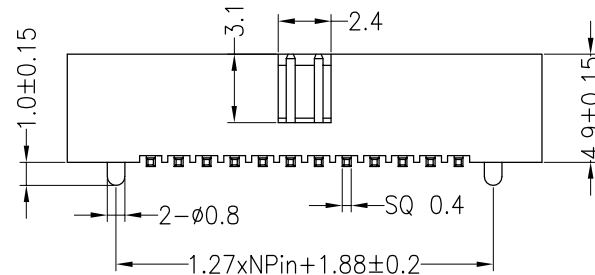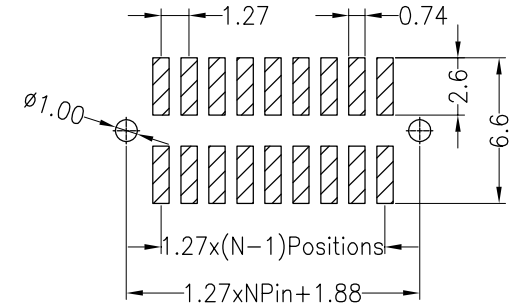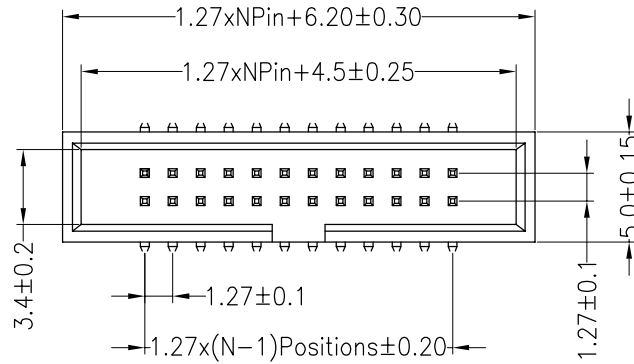

Ordering Information

3230 XX M XX X B K00 X 0X

No.of Pins 10-100P	Contact Plating G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold S0:Gold Flash/Tin SN:Tin	Insulator Material Option C=PA6T D=PA46 E=PA9T F=LCP	Packing O=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap	Stream code 01~99
-----------------------	---	--	---	----------------------

OPERATION		DRAW	Liu Miao	14.10.18	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10					
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL					

WFD 深圳市旺富达电子有限公司
 SHEN ZHEN WFD ELECTRONICS CO., LTD

B	2014.10.18	change terminal L=6.8mm → L=7.0mm	
A0	2012.03.28	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

PART NO. 3230XXMXXXBK00X0X
 TITLE: 1.27Box Header Npin H4.9 SMT L=7.0mm