

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Phoshpor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA9T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

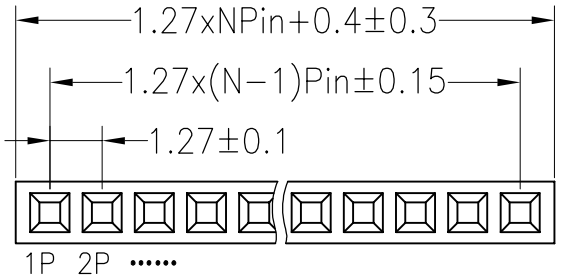


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

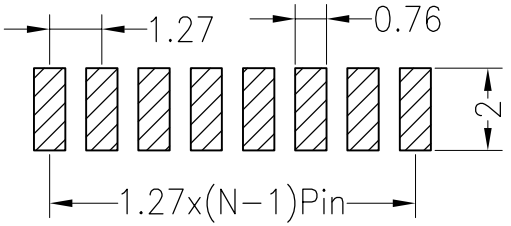


Ordering Information

2434 01 XX X N XX Z U X 01

- 01: No.of Pins Per Row 1*50
- XX: Insulator Material Option
  A=BK-PBT
  B=BK-PA66
  C=BK-PA6T
  D=BK-PA46
  E=BK-PA9T
  F=BK-LCP
- XX: Contact Plating
  G1:Gold Flash
  G2:1.5U" Gold
  G3:2U" Gold
  G4:3U" Gold
  G5:5U" Gold
  S0:Gold Flash/Tin
  SN:Tin
- X: Packing
  0=PE Bag
  A=Tray
  T=Tube
  P=Tube+Cap
  R=Reel
  M=Reel+Mylar

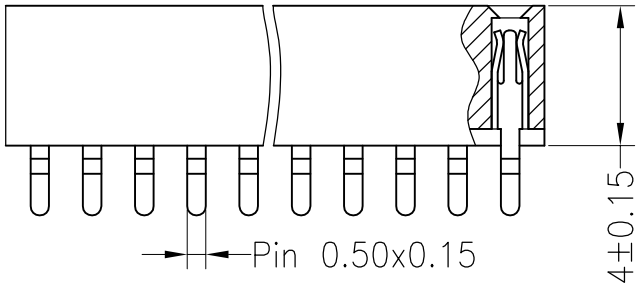

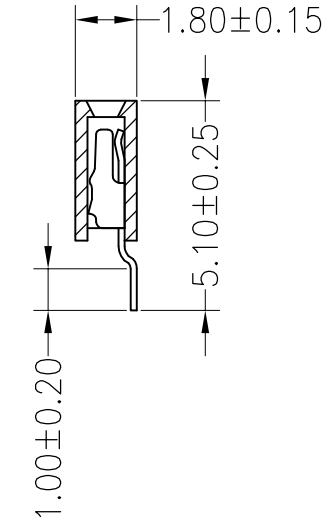

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	

OPERATION		DRAW	Liu Miao	12.03.28	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	243401XXXNXXZUX01
TITLE:	1.27PF H3.40mm 1xNpin 卧贴 W1.8