


HSF RoHS FILE NO:E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

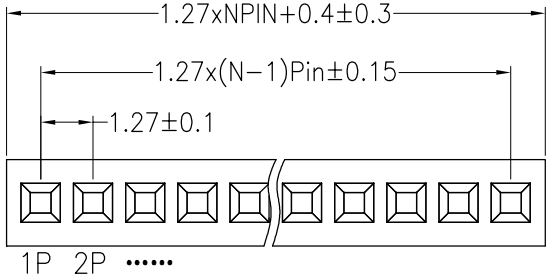

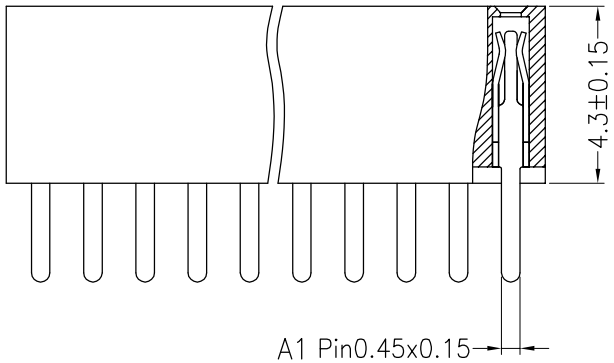




Ordering Information

2443 01 XX X N XX S U X 0X

- No.of Pins Per Row: 2~40
- Insulator Material Option: A=BK−PBT, C=BK−PA6T, D=BK−PA46, E=BK−PA9T, F=BK−LCP
- Contact Plating: G1:Gold Flash, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, G6:10U" Gold, G7:15U" Gold, S0:Gold Flash/Tin, SN:Tin
- Packing: 0=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar
- code stream: 01~99

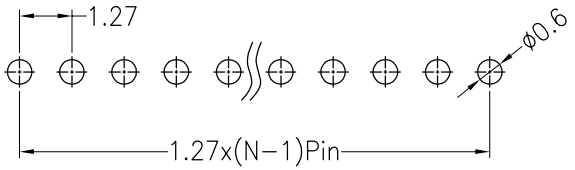

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2016.06.11	端子宽度由0.5改为0.45	
A0	2012.04.18	NEW DRAWING	

OPERATION		DRAW	Liu Miao	16.06.11	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	244301XXXNXXSUX0X
TITLE:	1.27PF 1xNPin H4.3 180° W2.1