

HSF RoHS FILE NO :E382810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

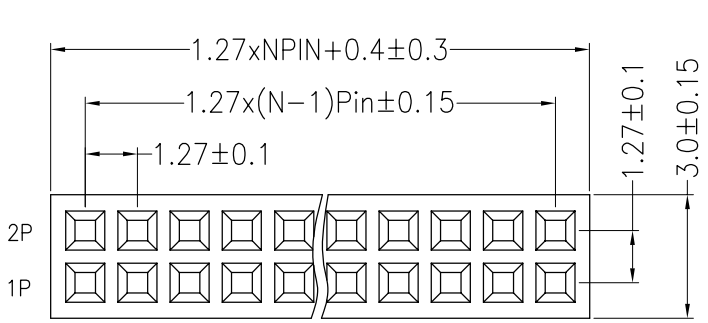


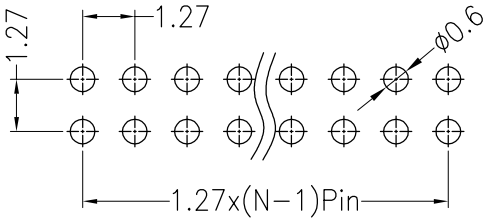


Ordering Information

2443C2 XX X N XX S O X 0X

- XX — No.of Pins 2*2~2*50
- X — Insulator Material Option
  A=BK−PBT
  C=BK−PA6T
  D=BK−PA46
  E=BK−PA9T
  F=BK−LCP
- XX — Contact Plating
  G1:Gold Flash
  G2:1.5U" Gold
  G3:2U" Gold
  G4:3U" Gold
  G5:5U" Gold
  G6:10U" Gold
  G7:15U" Gold
  S0:Gold Flash/Tin
  SN:Tin
- X — Packing
  0=PE Bag
  A=Tray
  T=Tube
  P=Tube+Cap
  R=Reel+Cap
  M=Reel+Mylar

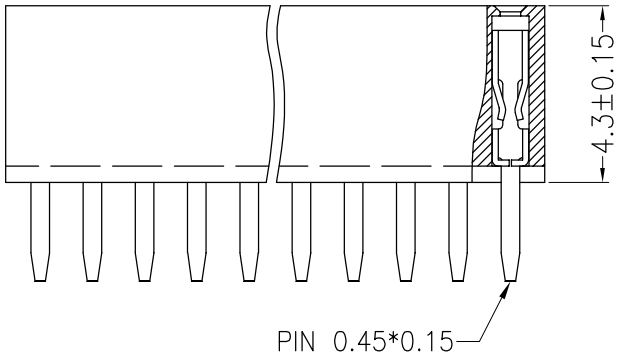



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2021.03.24	NEW DRAWING	

OPERATION		DRAW	Liu Miao	21.03.24	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	2443C2XXXNXXS0X0X
TITLE:	1.27PF 2xNPin H4.3 180°满底端子0型