
HSF RoHS


FILE NO :E362810

SPECIFICATIONS
Rated Current: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40°c to +105°c

Contact Material: Phosphor Bronze
Contact Plating: Au Over Ni
Insulator Material: Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

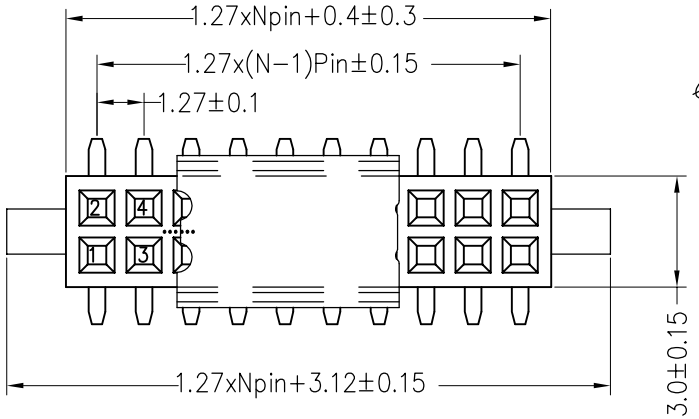


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

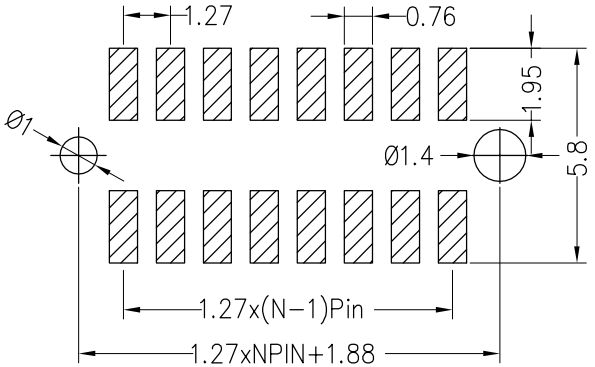


Ordering Information

2443 02 XX X S XX M U X 01

- XX: No.of Pins Per Row 2*50
- X: Insulator Material Option
  - A=BK−PBT
  - C=BK−PA6T
  - D=BK−PA46
  - E=BK−PA9T
  - F=BK−LCP
- XX: Contact Plating
  - G1: Gold Flash
  - G2: 1.5U" Gold
  - G3: 2U" Gold
  - G4: 3U" Gold
  - G5: 5U" Gold
  - S0: Gold Flash/Tin
  - SN: Tin
- X: Packing
  - 0=PE Bag
  - A=Tray
  - T=Tube
  - P=Tube+Cap
  - R=Reel+Cap

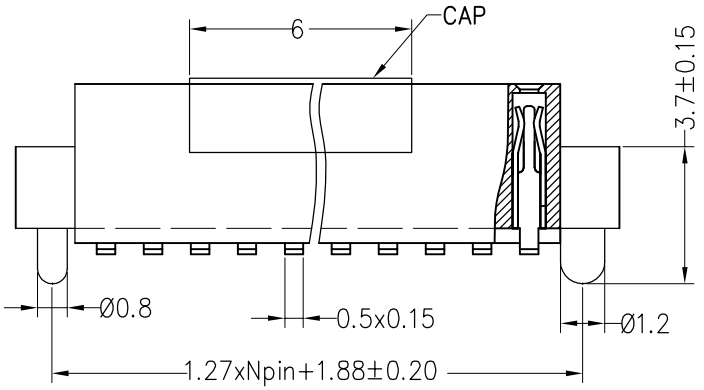



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.08.18	NEW DRAWING	

OPERATION		DRAW	Liu Miao	19.08.18
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	244302XXXSXXMUX01
TITLE:	1.27PF 2xNPin H4.3 SMT 夹持盖