

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

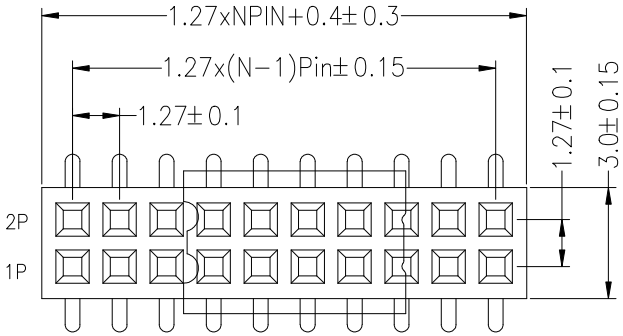


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

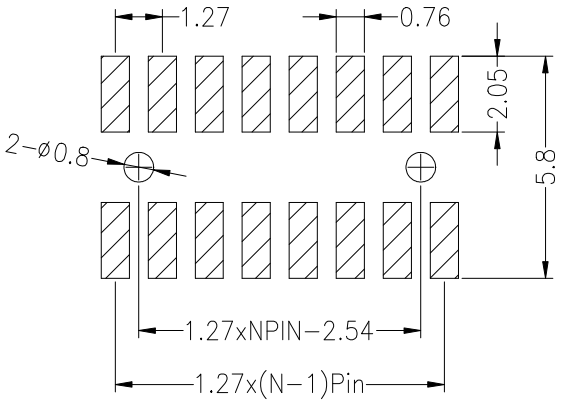


Ordering Information


2443 02 XX X X XX M U X 0X

No.of Pins Per Row 2−50P	Insulator Material Option	Post	Contact Plating				Packing
	C=BK−PA6T	W=With Post	G1:Gold Flash				0=PE Bag
	D=BK−PA46	N=W/O Post	G3:2U" Gold				A=Tray
	E=BK−PA9T		G4:3U" Gold				T=Tube
	F=BK−LCP		G5:5U" Gold				P=Tube+Cap
			G6:10U" Gold				R=Reel+Cap
			G7:15U" Gold				

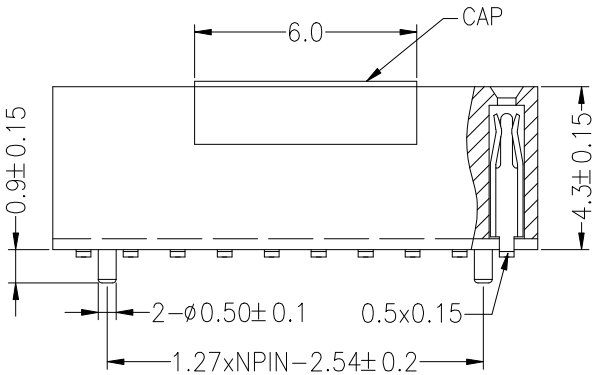



W= With Post



N= W/O Post

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2021.11.20	NEW DRAWING	

OPERATION		DRAW	Liu Miao	21.11.20
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	244302XXXXXXMUX0X
TITLE:	1.27PF 2xNPin H4.3 SMT **不锈钢夹持盖**