
HSF RoHS


FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

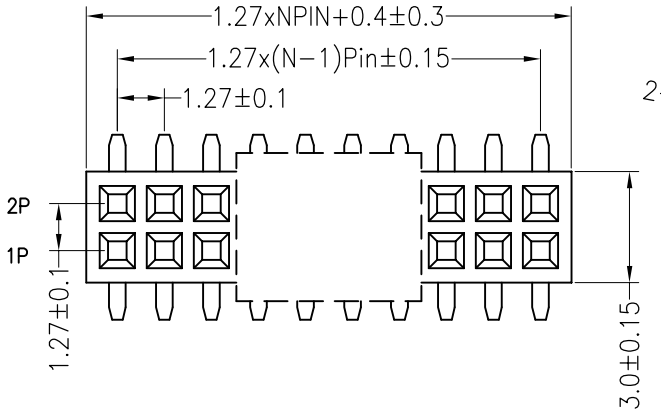



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

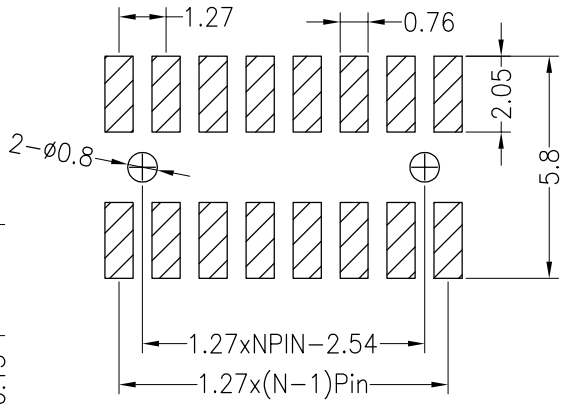


## Ordering Information

2443 02 XX X W XX M U X 01

| | | | | | |
|---|---|---|---|---|---|
| No.of Pins Per Row 02~40P | Insulator Material Option | Contact Plating | Packing | code stream | |
| | A=BK−PBT | G1:1U" Gold | 0=PE Bag | 01~99 | |
| | B=BK−PA66 | G2:1.5U" Gold | A=Tray | | |
| | C=BK−PA6T | G3:2U" Gold | T=Tube | | |
| | D=BK−PA46 | G4:3U" Gold | P=Tube+Cap | | |
| | E=BK−PA9T | G5:5U" Gold | R=Reel+Cap | | |
| | F=BK−LCP | G6:10U" Gold | M=Reel+Mylar | | |
| | | G7:15U" Gold | | | |
| | | S0:Gold Flash/Tin | | | |
| | | SN:Tin | | | |

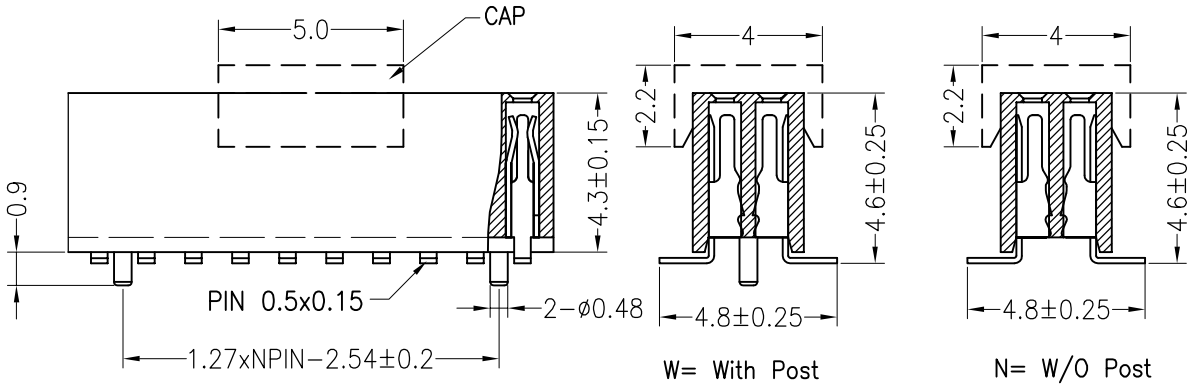


| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|---|---|---|---|
| A0 | 2012.04.18 | NEW DRAWING | |

| OPERATION | | DRAW | Liu Miao | 12.04.18 | SCALE | FIT |
|---|---|---|---|---|---|---|
| X.X | ±0.30 | | | | UNIT | mm |
| X.XX | ±0.20 | CHECK | | | SIZE | A4 |
| X.XXX | ±0.10 | | | | SHEET | 1/1 |
| Angle | ±3° | APPROVE | | | PROJ. | |
| DIM | TOL | | | | | |

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

| | |
|---|---|
| PART NO. | 244302XXXWXXMUX01 |
| TITLE: | 1.27PF 2xNPin H4.3 SMT 塑胶夹持盖 |