

HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°C to +105°C


Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

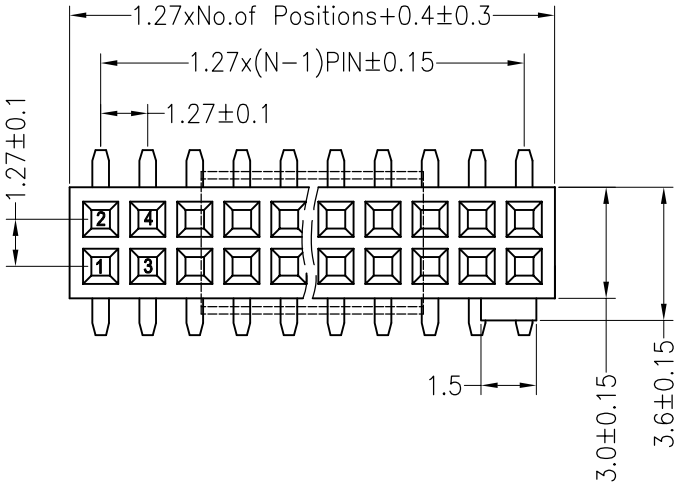

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

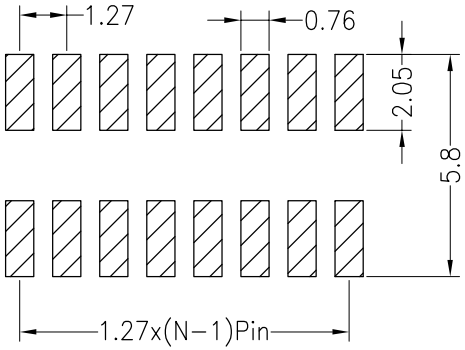

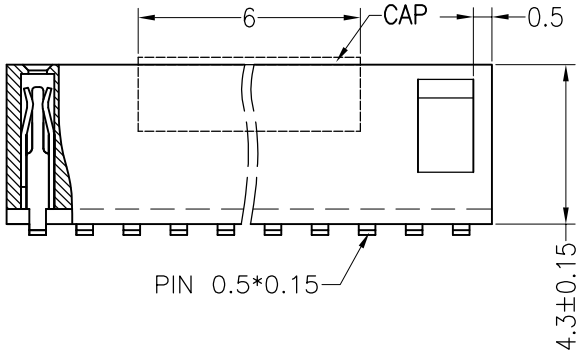



Ordering Information

2443 02 XX X N XX M U X 04

No.of Pins	Insulator Material Option	Post	Contact Plating				Packing
2*2~2*50	A=BK−PBT	W=With Post	G0:Gold Flash	G3:10U" Gold	G5:30U" Gold	SN:Tin	T=Tube
	B=BK−PA66	N=W/O Post	G1:3U" Gold	G4:15U" Gold	S0:Gold Flash/Tin		P=Tube+Cap
	C=BK−PA6T		G2:5U" Gold				R=Reel+Cap
	D=BK−PA46						M=Reel+Mylar
	E=BK−PA9T						
	F=BK−LCP						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018.12.15	NEW DRAWING	

OPERATION		DRAW	Liu Miao	18.12.15
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	244302XXXNXXMUX04
TITLE:	1.27PF 2xNPin H4.3 W3.0 SMT with bump