

HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

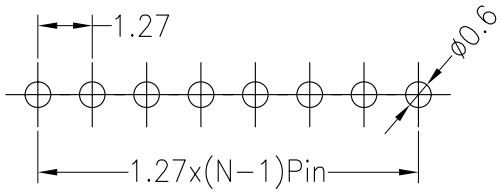

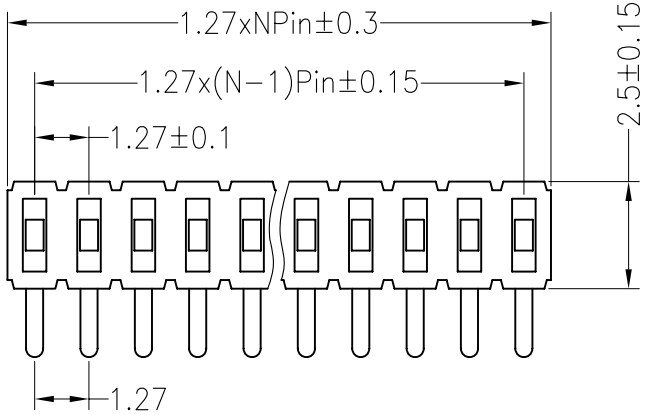

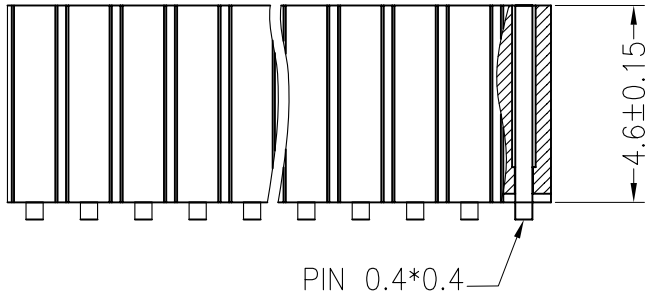



Ordering Information

2446 01 XX X N XX R Y X 01

- No.of Pins Per Row: 1*50
- Insulator Material Option:
  - A=BK−PBT
  - B=BK−PA66
  - C=BK−PA6T
  - D=BK−PA46
  - F=BK−LCP
- Contact Plating:
  - G0:0.8U" Gold
  - G1:1U" Gold
  - G2:1.5U" Gold
  - G3:2U" Gold
  - G4:3U" Gold
  - G5:5U" Gold
  - G6:10U" Gold
  - G7:15U" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- Packing:
  - 0=PE Bag
  - A=Tray
  - T=Tube
  - P=Tube+Cap
  - R=Reel+Cap
  - M=Reel+Mylar

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	

OPERATION		DRAW	Liu Miao	12.04.18
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	244601XXXNXXRYX01
TITLE:	1.27PF 1xNPin H4.6mm 90°