

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Soldering temperature: 260°C±5° 5S

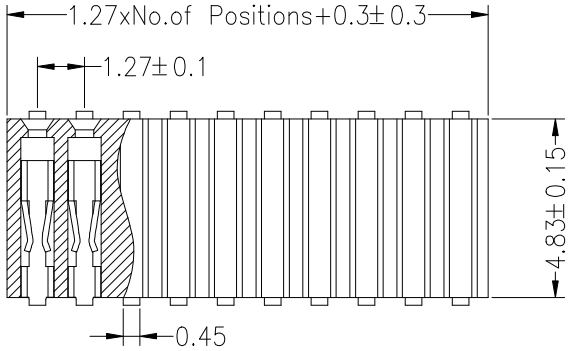


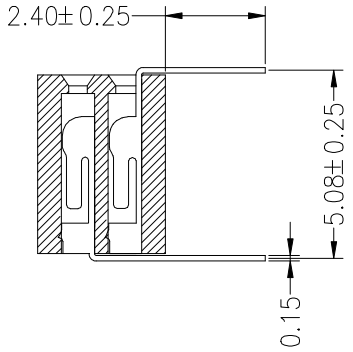


Ordering Information

2435 02 XX X N XX R U X 0X

- 2435 02: No.of Pins Per Row 2−50
- XX: Insulator Material Option
  - C=BK−PA6T
  - E=BK−PA9T
  - F=BK−LCP
- X: N
- XX: Contact Plating
  - G1:Gold Flash
  - G3:2U" Gold
  - G4:3U" Gold
  - G5:5U" Gold
  - G6:10U" Gold
  - G7:15U" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- R U X 0X: Packing
  - T=Tube
  - M=Reel+Mylar

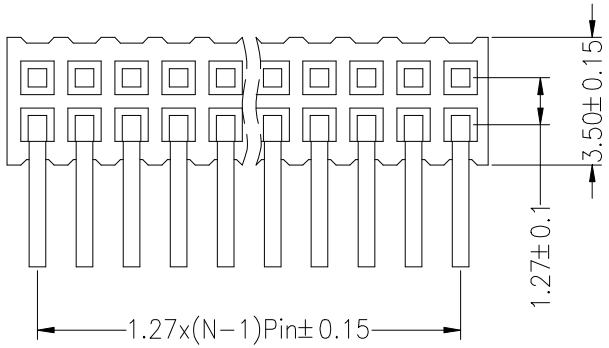

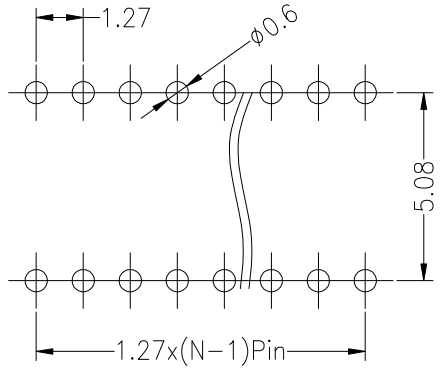

P.C.B Layout

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018.03.20	NEW DRAWING	

OPERATION		DRAW	Liu Miao	18.03.20
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	243502XXXNXXRUX0X
TITLE:	1.27PF 2xNPin H3.45 W4.83 90°