


HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:2.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

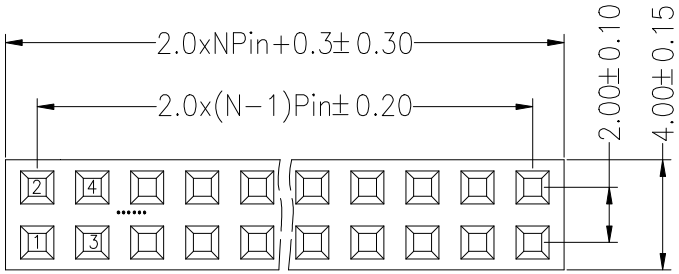

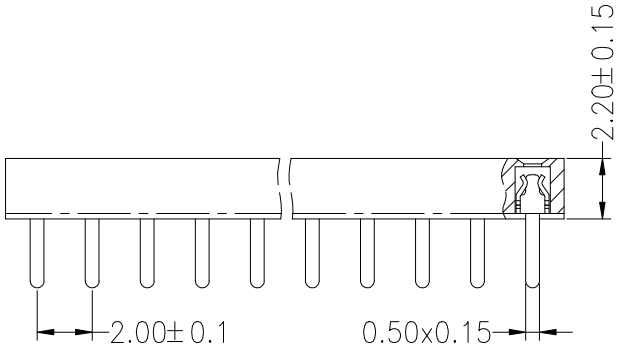




## *Ordering Information*

**2322 02 XX X N XX S U X 0X**

- No.of Pins Per Row: 2−40
- Insulator Material Option: C=BK−PA6T; F=BK−LCP
- Contact Plating: G1:Gold Flash; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; G6:10U" Gold; G6:15U" Gold; SN:Tin
- Packing: A=Tray; T=Tube; P=Tube+Cap; R=Reel+Cap

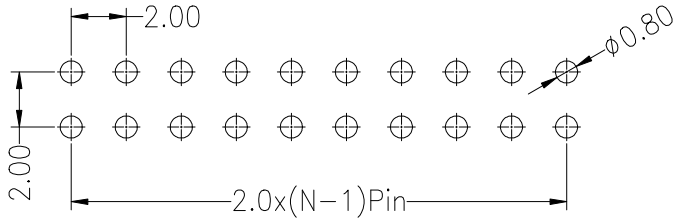


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|---|---|---|---|
| A0 | 2012.04.18 | NEW DRAWING | |

| OPERATION | | DRAW | Liu Miao | 12.04.18 | SCALE | FIT |
|---|---|---|---|---|---|---|
| X.X | ± 0.30 | | | | UNIT | mm |
| X.XX | ± 0.20 | CHECK | | | SIZE | A4 |
| X.XXX | ± 0.10 | | | | SHEET | 1/1 |
| Angle | ± 3° | APPROVE | | | PROJ. | |
| DIM | TOL | | | | | |

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

| PART NO. | 232202XXXNXXSUX0X |
|---|---|
| TITLE: | 2.00PF H2.20mm 2xNpin 180° |