
HSF RoHS


FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

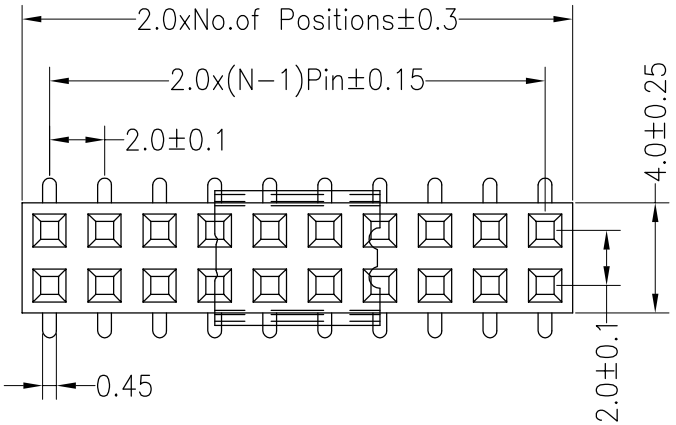


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

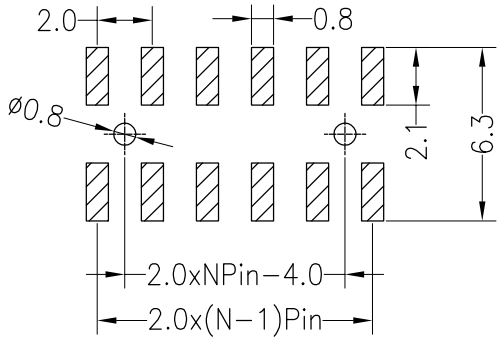


Ordering Information


2328 02 XX X X XX M U X 01

No.of Pins	Insulator Material Option	Post	Contact Plating		Packing	
2x2~2*40	A=BK−PBT	W=With Post	G0:Gold Flash		0=PE Bag	
	C=BK−PA6T	N=W/O Post	G1:3U" Gold		A=Tray	
	D=BK−PA46		G2:5U" Gold		T=Tube	
	E=BK−PA9T		G3:10U" Gold		P=Tube+Cap	
	F=BK−LCP		G4:15U" Gold		R=Reel+Cap	
			G5:30U" Gold		M=Reel+Mylar	
			S0:Gold Flash/Tin			
			SN:Tin			

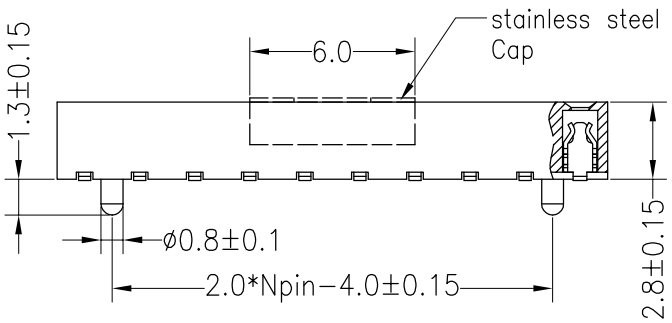



W= With Post



N= W/O Post

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020.05.08	NEW DRAWING	

OPERATION		DRAW	Liu Miao	20.05.08
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	232802XXXXXXMUX01
TITLE:	2.0PF H2.80mm 2xNpin SMT