


版次(Ed')	变更摘要(Change The Content)	日期(Date)
1	增加料号说明(Add Material Number Description)	2015/1/28


序号 No.	品名Name	材质Material
①	0.5拉拔3代胶芯(H2.0) 0.5 Pitch ZIF Type 3 Housing (H=2.0)	LCP UL94V-0 本色 **Natural**
②	0.5拉拔下接端子(H2.0) 0.5 Pitch H2.0 ZIF R/A Type Under terminal	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	0.5拉拔3代后盖(H2.0) 0.5 Pitch ZIF Type 3 Actuator (H=2.0)	LCP UL94V-0 黑色 **Black**
④	0.5拉拔3代焊片(H2.0) 0.5 Pitch ZIF Type 3 Fitting Nail (H=2.0)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

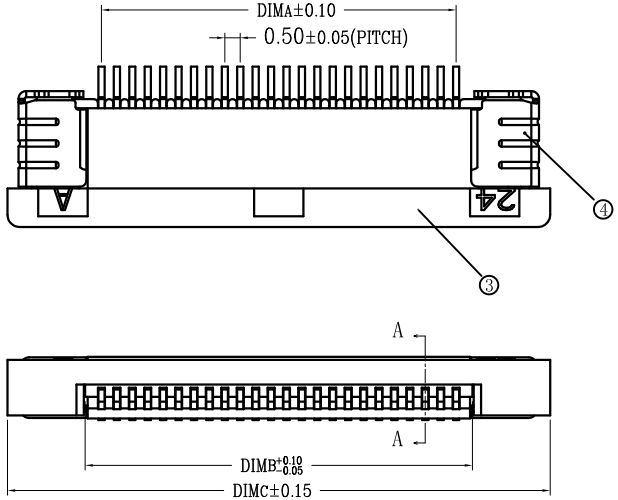







SECTION A-A

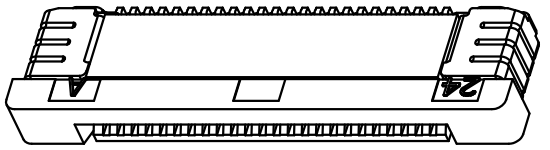

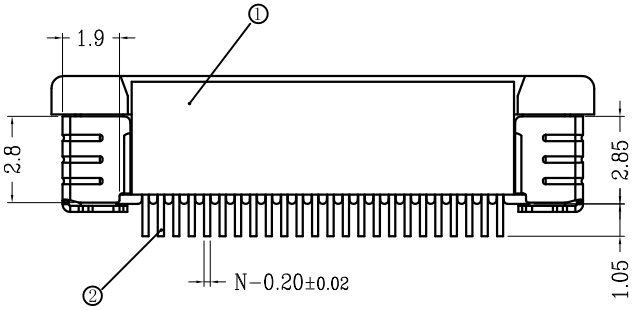

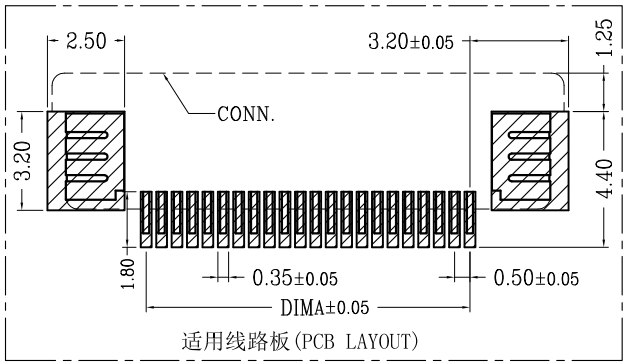

适用线路板(PCB LAYOUT)

CKT	DIM A	DIM B	DIM C	DIM D
4	1.50	2.56	7.60	5.20
5	2.00	3.06	8.10	
6	2.50	3.56	8.60	
7	3.00	4.06	9.10	
8	3.50	4.56	9.60	
9	4.00	5.06	10.10	
10	4.50	5.56	10.60	
11	5.00	6.06	11.10	
12	5.50	6.56	11.60	
13	6.00	7.06	12.10	
14	6.50	7.56	12.60	
15	7.00	8.06	13.10	
16	7.50	8.56	13.60	
17	8.00	9.06	14.10	
18	8.50	9.56	14.60	
19	9.00	10.06	15.10	
20	9.50	10.56	15.60	
21	10.00	11.06	16.10	
22	10.50	11.56	16.60	
23	11.00	12.06	17.10	
24	11.50	12.56	17.60	
25	12.00	13.06	18.10	
26	12.50	13.56	18.60	
27	13.00	14.06	19.10	
28	13.50	14.56	19.60	
29	14.00	15.06	20.10	
30	14.50	15.56	20.60	
31	15.00	16.06	21.10	
32	15.50	16.56	21.60	


CKT	DIM A	DIM B	DIM C	DIM D
33	16.00	17.06	22.10	5.20
34	16.50	17.56	22.60	
35	17.00	18.06	23.10	5.75
36	17.50	18.56	23.60	
37	18.00	19.06	24.10	
38	18.50	19.56	24.60	
39	19.00	20.06	25.10	
40	19.50	20.56	25.60	
41	20.00	21.06	26.10	
42	20.50	21.56	26.60	
43	21.00	22.06	27.10	
44	21.50	22.56	27.60	
45	22.00	23.06	28.10	
46	22.50	23.56	28.60	
47	23.00	24.06	29.10	
48	23.50	24.56	29.60	
49	24.00	25.06	30.10	
50	24.50	25.56	30.60	
51	25.00	26.06	31.10	
52	25.50	26.56	31.60	
53	26.00	27.06	32.10	
54	26.50	27.56	32.60	
55	27.00	28.06	33.10	
56	27.50	28.56	33.60	
57	28.00	29.06	34.10	
58	28.50	29.56	34.60	
59	29.00	30.06	35.10	
60	29.50	30.56	35.60	

技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、 缺陷、裂纹等现象.
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围(Temperature range): -25° C～+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): ≤0.03Ω.
5. 绝缘电阻(Insulation resistance):≥500MΩ.
6. 产品料号(Product material No.):

WFD-05202—** * *—**

- NO OF CKT(产品PIN数)
- Plating(电镀方式)
  - 0: 端子全雾锡(Terminal all mist tin)
  - 1: 端子全金(Terminal G/F OVERALL)
- Packing(包装方式)
  - T: TUBE管装
  - R: TAPE & REEL卷装
- OW 后盖无LOGO(Actuator without LOGO)

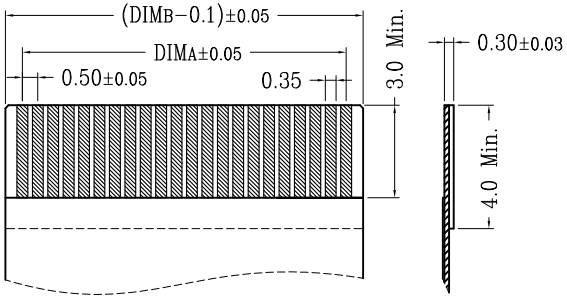

适用扁平线(Applicable Flat Cable)

RoHS

一般公差(TOLERANCE)
X. ±.50 .XX ±.10
.X ±.20 .XXX ±.05
ANGLES ±1°

WFDCONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

品名 (TITLE): 0.5 Pitch拉拔卧式3代下接(H=2.0)
0.5 Pitch H2.0 ZIF R/A Type 3 Unper CONN.

制图 (DR): LIU MIAO
校对 (CHKD):
审核 (APPD):

料号 (DWG.NO): WFD-05202-200R-0W

比例 (SCALE): 1:1
单位 (UNITS): mm
张数 (SHEET): 1 OF 1
SIZE: A4
REV: A