


版次(Ed')	变更摘要(Change The Content)	日期(Date)
1	增加料号说明(Add Material Number Description)	2015/1/28


序号	品名	材质
①	0.5拉拔3代胶芯(H2.0) 0.5 Pitch ZIF Type 3 Housing (H=2.0)	LCP UL94V-0 本色 **Natural**
②	0.5拉拔立式3代端子 0.5 Pitch ZIF S/T Type 3 terminal	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	0.5拉拔3代后盖(H2.0) 0.5 Pitch ZIF Type 3 Actuator (H=2.0)	LCP UL94V-0 黑色 **Black**
④	0.5拉拔3代焊片(H2.0) 0.5 Pitch ZIF Type 3 Fitting Nail (H=2.0)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

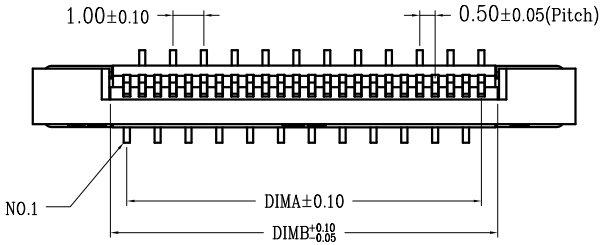





With cover(6--34Pin)

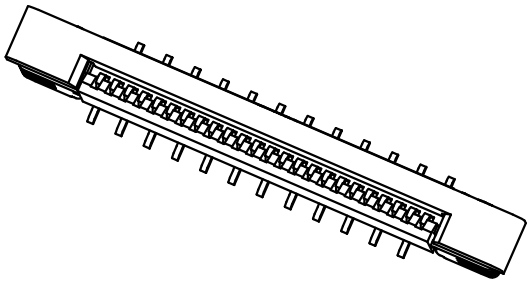


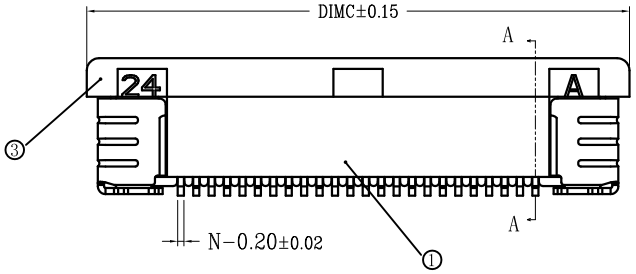






SECTION A-A

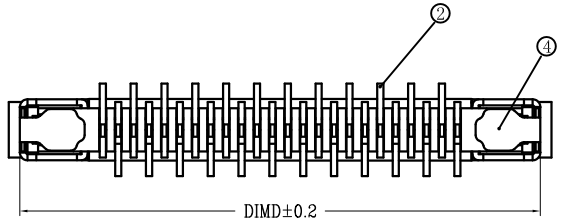

CKT	DIM A	DIM B	DIM C	DIM D	DIM E
4	1.50	2.56	7.60	6.88	
5	2.00	3.06	8.10	7.38	
6	2.50	3.56	8.60	7.88	
7	3.00	4.06	9.10	8.38	
8	3.50	4.56	9.60	8.88	
9	4.00	5.06	10.10	9.38	
10	4.50	5.56	10.60	9.88	
11	5.00	6.06	11.10	10.38	
12	5.50	6.56	11.60	10.88	
13	6.00	7.06	12.10	11.38	
14	6.50	7.56	12.60	11.88	
15	7.00	8.06	13.10	12.38	
16	7.50	8.56	13.60	12.88	
17	8.00	9.06	14.10	13.38	
18	8.50	9.56	14.60	13.88	
19	9.00	10.06	15.10	14.38	4.45
20	9.50	10.56	15.60	14.88	
21	10.00	11.06	16.10	15.38	
22	10.50	11.56	16.60	15.88	
23	11.00	12.06	17.10	16.38	
24	11.50	12.56	17.60	16.88	
25	12.00	13.06	18.10	17.38	
26	12.50	13.56	18.60	17.88	
27	13.00	14.06	19.10	18.38	
28	13.50	14.56	19.60	18.88	
29	14.00	15.06	20.10	19.38	
30	14.50	15.56	20.60	19.88	
31	15.00	16.06	21.10	20.38	
32	15.50	16.56	21.60	20.88	
33	16.00	17.06	22.10	21.38	
34	16.50	17.56	22.60	21.88	

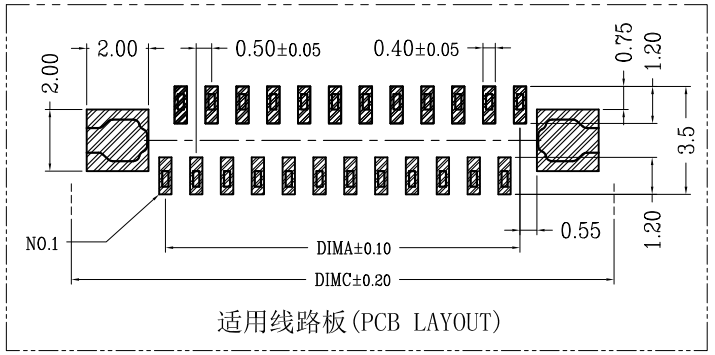

适用线路板(PCB LAYOUT)

技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、 缺陷、裂纹等现象.
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围(Temperature range): -25° C～+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): ≤0.03Ω.
5. 绝缘电阻(Insulation resistance): ≥500MΩ.
6. 产品料号(Product material No.):


WFD-05453—** * *—1*

NO OF CKT(产品PIN数)

Plating(电镀方式)
- 0: 端子全雾锡(Terminal all mist tin)
- 1: 端子全金(Terminal G/F OVERALL)

Packing(包装方式)
- T: TUBE管装
- R: TAPE & REEL卷装
- M: TAPE & REEL WITH MYLAR贴MYLAR卷装
- N: TUBE & WITH MYLAR贴MYLAR管装
- C: TAPE & REEL WITH COVER加吸盖卷装

1W	成品1代: 后盖无LOGO (Actuator without LOGO)

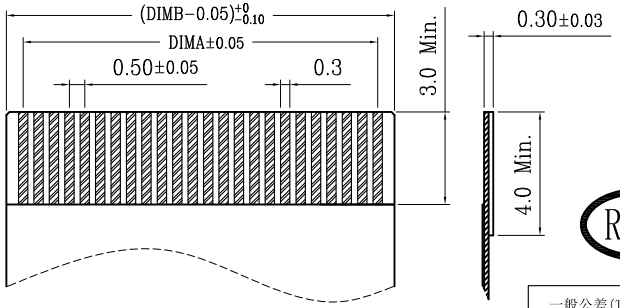

适用扁平线(Applicable Flat Cable)

RoHS

一般公差(TOLERANCE)
X ±.50 .XX ±.10
.X ±.20 .XXX ±.05
ANGLES ±1°

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

品名 (TITLE): 0.5 Pitch 拉拔立式3代正脚位1代
0.5 Pitch H4.5 ZIF S/T Positive Pointer Type CONN.


制图 (DR): LIU MIAO
校对 (CHKD):
审核 (APPD):


料号 (DWG.NO): WFD-05453-200C-1W

比例 (SCALE): 1:1
单位 (UNITS): mm
张数 (SHEET): 1 OF 2
SIZE: A4
REV: A


版次(Ed')	变更摘要(Change The Content)	日期(Date)
1	增加料号说明(Add Material Number Description)	2015/1/28


序号	品名	材质
①	0.5拉拔3代胶芯(H2.0) 0.5 Pitch ZIF Type 3 Housing (H=2.0)	LCP UL94V-0 本色 **Natural**
②	0.5拉拔立式3代端子 0.5 Pitch ZIF S/T Type 3 terminal	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	0.5拉拔3代后盖(H2.0) 0.5 Pitch ZIF Type 3 Actuator (H=2.0)	LCP UL94V-0 黑色 **Black**
④	0.5拉拔3代焊片(H2.0) 0.5 Pitch ZIF Type 3 Fitting Nail (H=2.0)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

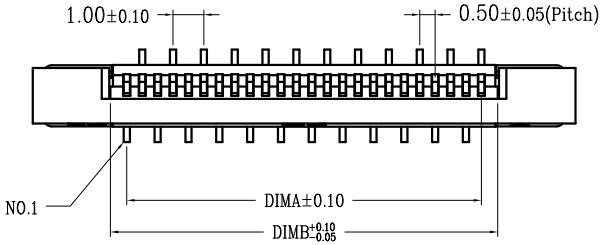





With cover(35--60Pin)

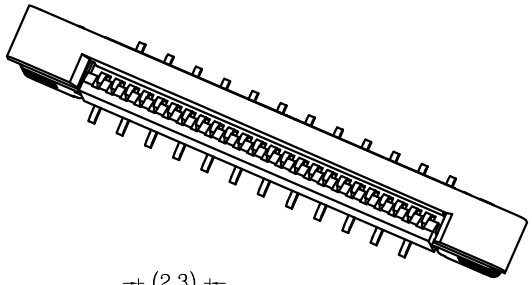


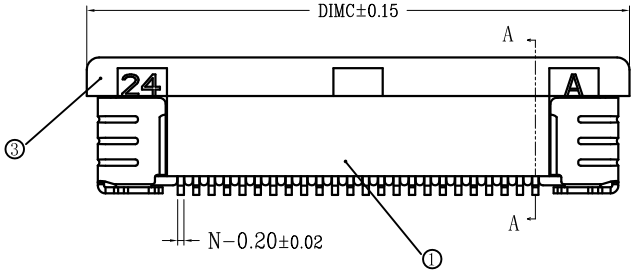






SECTION A-A

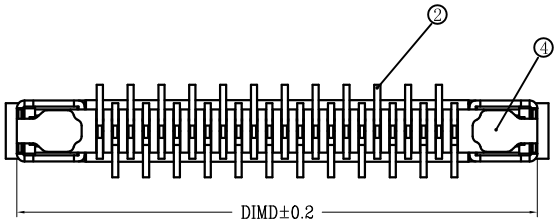

CKT	DIM A	DIM B	DIM C	DIM D	DIM E
35	17.00	18.06	23.10	22.38	5.00
36	17.50	18.56	23.60	22.88	
37	18.00	19.06	24.10	23.38	
38	18.50	19.56	24.60	23.88	
39	19.00	20.06	25.10	24.38	
40	19.50	20.56	25.60	24.88	
41	20.00	21.06	26.10	25.38	
42	20.50	21.56	26.60	25.88	
43	21.00	22.06	27.10	26.38	
44	21.50	22.56	27.60	26.88	
45	22.00	23.06	28.10	27.38	
46	22.50	23.56	28.60	27.88	
47	23.00	24.06	29.10	28.38	
48	23.50	24.56	29.60	28.88	
49	24.00	25.06	30.10	29.38	
50	24.50	25.56	30.60	29.88	
51	25.00	26.06	31.10	30.38	
52	25.50	26.56	31.60	30.88	
53	26.00	27.06	32.10	31.38	
54	26.50	27.56	32.60	31.88	
55	27.00	28.06	33.10	32.38	
56	27.50	28.56	33.60	32.88	
57	28.00	29.06	34.10	33.38	
58	28.50	29.56	34.60	33.88	
59	29.00	30.06	35.10	34.38	
60	29.50	30.56	35.60	34.88	

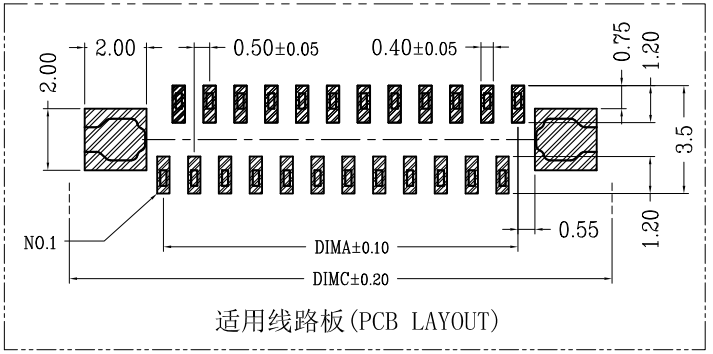

适用线路板(PCB LAYOUT)

技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、 缺陷、裂纹等现象.
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围(Temperature range): -25° C～+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): ≤0.03Ω.
5. 绝缘电阻(Insulation resistance): ≥500MΩ.
6. 产品料号(Product material No.):


WFD05503—** * *—1*

10	成品1代:后盖有LOGO:WD (Actuator with LOGO:WD)
1W	成品1代:后盖无LOGO (Actuator without LOGO)

NO OF CKT(产品PIN数)

Plating(电镀方式)
0: 端子全雾锡(Terminal all mist tin)
1: 端子全金(Terminal G/F OVERALL)

Packing(包装方式)
T: TUBE管装
R: TAPE & REEL卷装
M: TAPE & REEL WITH MYLAR贴MYLAR卷装
N: TUBE & WITH MYLAR贴MYLAR管装
C: TAPE & REEL WITH COVER加吸盖卷装

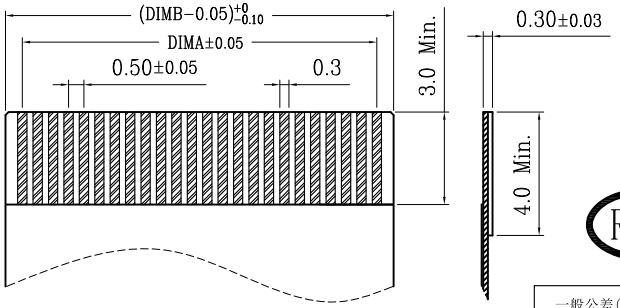

适用扁平线(Applicable Flat Cable)

RoHS

一般公差(TOLERANCE)
X ±.50 .XX ±.10
.X ±.20 .XXX ±.05
ANGLES ±1°

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

品名 (TITLE): 0.5 Pitch 拉拔立式3代正脚位1代
0.5 Pitch H5.5 ZIF S/T Positive Pointer Type CONN.

制图 (DR): LIU MIAO
校对 (CHKD):
审核 (APPD):

料号 (DWG.NO): WFD-05453-200C-1W

比例 (SCALE): 1:1
单位 (UNITS): mm
张数 (SHEET): 2 OF 2
SIZE: A4
REV: A