

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current: 1.5AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40°c to +105°c

Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: Polyester(UL94V−0)
Standard: LCP
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

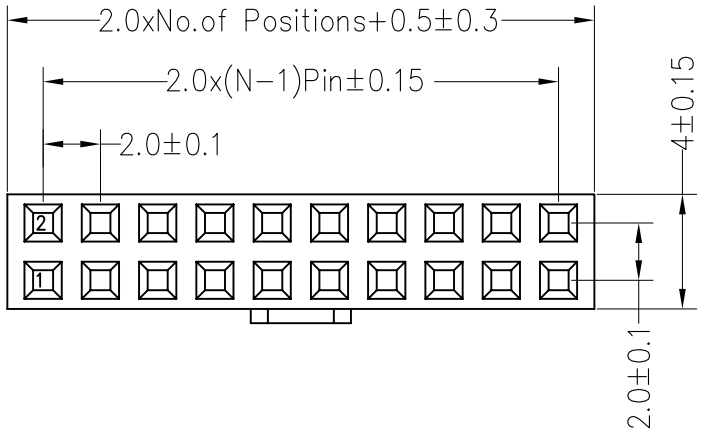


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

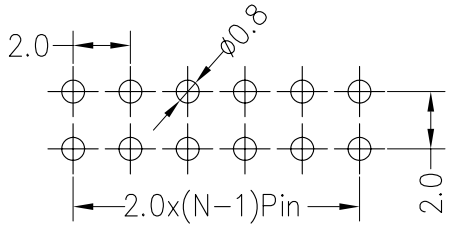


Ordering Information

2343 02 XX X N XX S U W X 01

- 02: No.of Pins Per Row 2*40
- XX: Insulator Material Option
  - A=BK−PBT
  - B=BK−PA66
  - C=BK−PA6T
  - D=BK−PA46
  - F=BK−LCP
- X: Contact Plating
  - G0: Gold Flash
  - G2: 5U" Gold
  - G3: 10U" Gold
  - G4: 15U" Gold
  - G5: 30U" Gold
  - S0: Gold Flash/Tin
  - SN: Tin
- XX: Packing
  - T=Tube
  - P=Tube+Cap
  - R=Reel+Cap
  - M=Reel+Mylar

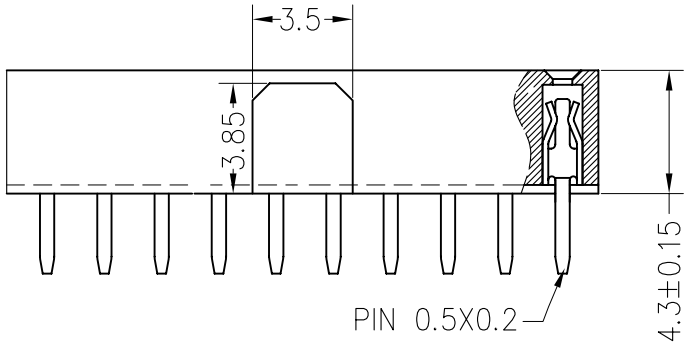



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.07.23	NEW DRAWING	

OPERATION		DRAW	Liu Miao	12.07.23
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	234302XXXNXXSUWX01
TITLE:	2.00PF H4.3mm 2xNpin 180° with bump