

HSF RoHS FILE NO:E362610


SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

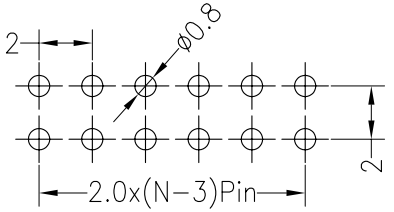

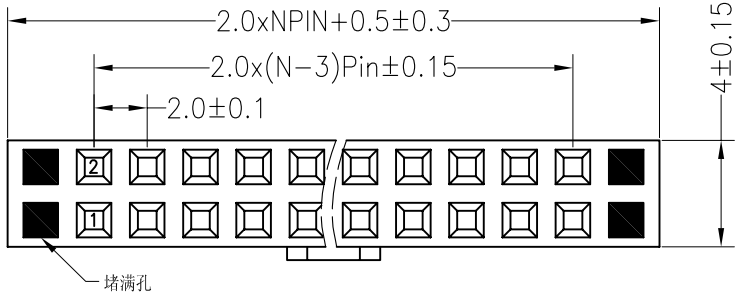

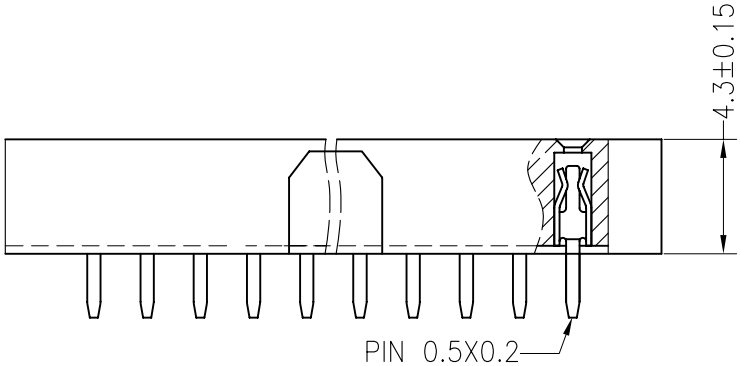



Ordering Information

2343 02 XX X N XX S U X 05

No.of Pins Per Row	Insulator Material Option	Contact Plating	Packing
2*7	A=BK−PBT	G1:Gold Flash	0=PE Bag
2*10	B=BK−PA66	G2:1.5U" Gold	A=Tray
2*12	C=BK−PA6T	G3:2U" Gold	T=Tube
2*15	D=BK−PA46	G4:3U" Gold	P=Tube+Cap
2*17	E=BK−PA9T	G5:5U" Gold	R=Reel+Cap
2*20	F=BK−LCP	S0:Gold Flash/Tin	M=Reel+Mylar
2*22		SN:Tin	
2*24P			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.07.23	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	12.07.23
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	2343−02XXXNXXSU05
TITLE:	2.00PF H4.3mm 2xNpin 180° 带凸W4.5