


HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

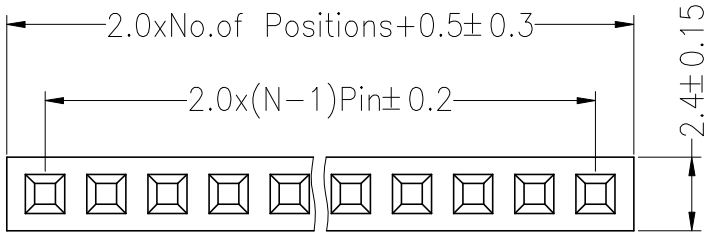

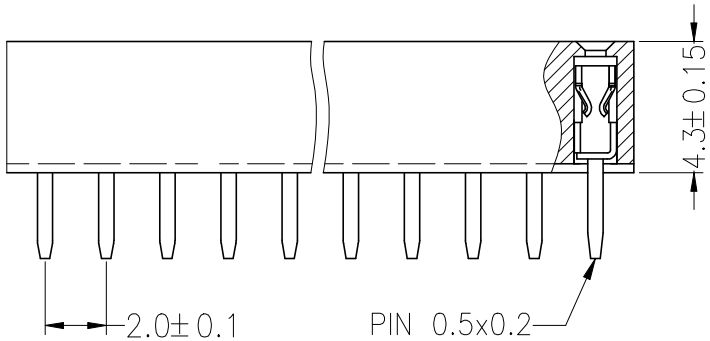




## *Ordering Information*

**2343 C1 XX X N XX S O X 0X**

- **XX** — No.of Pins 2−40
- **X** — Insulator Material Option
  - A=BK−PBT
  - C=BK−PA6T
  - E=BK−PA9T
  - F=BK−LCP
- **XX** — Contact Plating
  - G1:Gold Flash
  - G3:2U" Gold
  - G4:3U" Gold
  - G5:5U" Gold
  - G6:10U" Gold
  - G7:15U" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- **X** — Packing
  - A=Tray
  - T=Tube

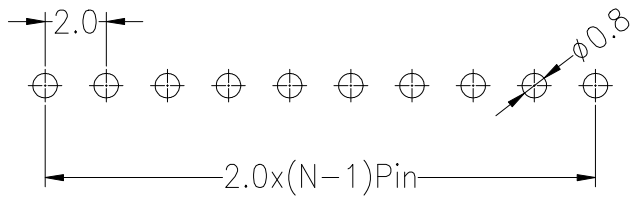


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| A0 | 2016.04.18 | NEW DRAWING | |

| OPERATION | | DRAW | Liu Miao | 16.04.18 |
|---|---|---|---|---|
| X.X | ± 0.30 | | | |
| X.XX | ± 0.20 | CHECK | | |
| X.XXX | ± 0.10 | | | |
| Angle | ± 3° | APPROVE | | |
| DIM | TOL | | | |

| SCALE | FIT |
|---|---|
| UNIT | mm |
| SIZE | A4 |
| SHEET | 1/1 |
| PROJ. | |

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

| PART NO. | 2343C1XXXNXXSOX0X |
|---|---|
| TITLE: | 2.0PF H4.30mm 1xNpin 180° O型满底端子 |