

HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:400V AC/DC
Insulation Resistance:800MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

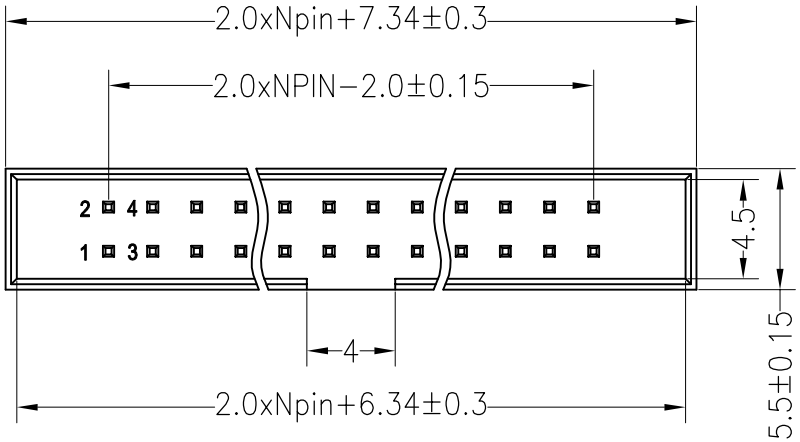

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

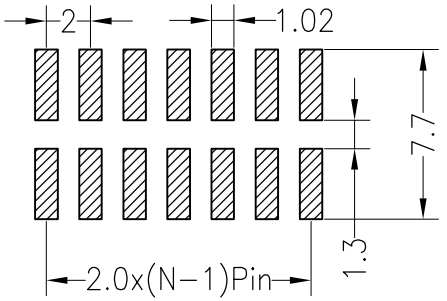

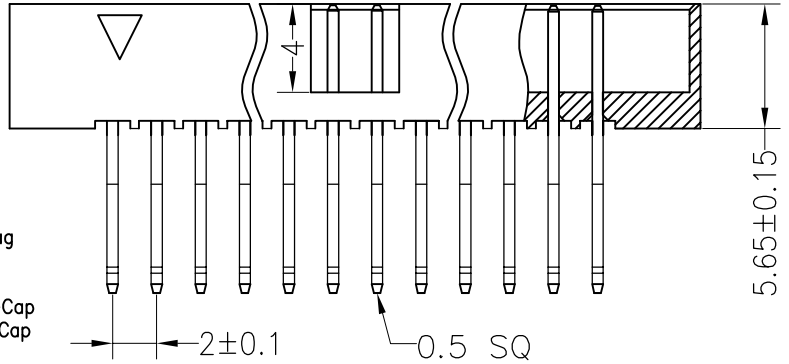

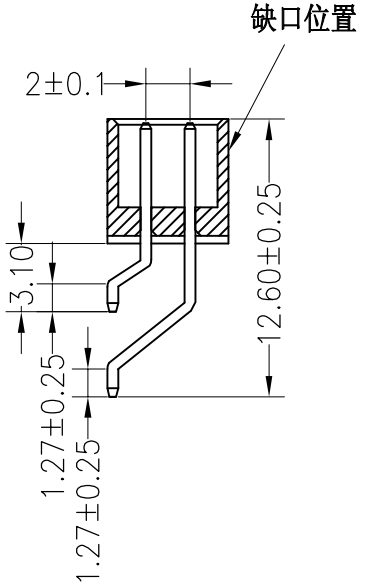

Ordering Information

3220- XX Z XX X B K00 X 01

- XX: No.of Pins Per Row 6--64
- Z: Contact Plating
  G0:Gold Flash
  G1:1U" Gold
  G2:1.5U" Gold
  G3:2U" Gold
  G4:3U" Gold
  G5:5U" Gold
  S0:Gold Flash/Tin
- XX: Insulator Material Option
  A=BK−PBT
  C=BK−PA6T
  D=BK−PA46
  E=BK−PA9T
  F=BK−LCP
- X: Packing
  0=PE Bag
  A=Tray
  T=Tube
  P=Tube+Cap
  R=Reel+Cap

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	

OPERATION		DRAW	Liu Miao	12.03.28
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD 深圳市旺富达电子有限公司
CONN SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	3220−XXZXXXBK00X01
TITLE:	2.0Box Header Npin H5.65 卧贴