

HSF RoHS


FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Phosphor bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

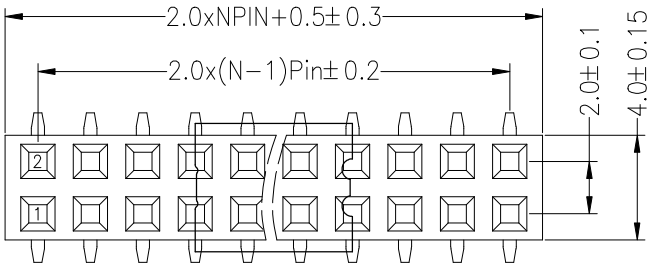

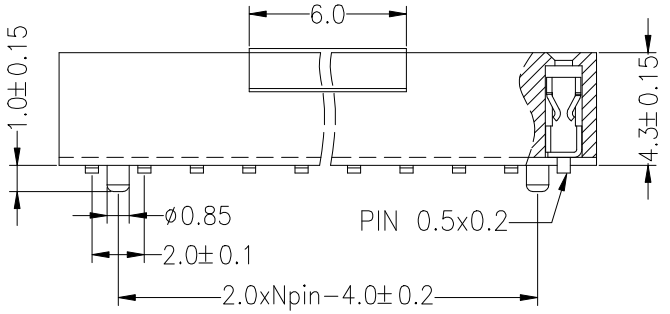



W= With Post




N= W/O Post

Ordering Information

2343C 2 XX X X XX M O X 0X

No.of Pins Per Row 2−40	Insulator Material Option C=BK−PA6T E=BK−PA9T F=BK−LCP	Post W=With Post N=W/O Post	Contact Plating G1:Gold Flash G3:2U" Gold G4:3U" Gold G5:5U" Gold S0:Gold Flash/Tin SN:Tin	Packing A=Tray T=Tube R=ReeL+Cap P=Tube+Cap	code stream 01~99	

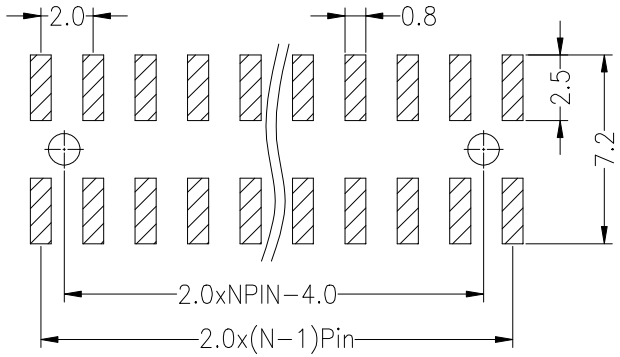

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.03.02	NEW DRAWING	

OPERATION		DRAW	Liu Miao	22.03.02
X.X	± 0.30			
X.XX	± 0.20	CHECK		
X.XXX	± 0.10			
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	2343C2XXXXXXMOX0X
TITLE:	2.0PF 2xNPin H4.3 W4.0 SMT 满底O端