

HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

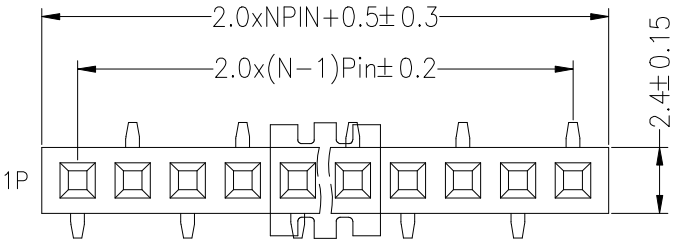


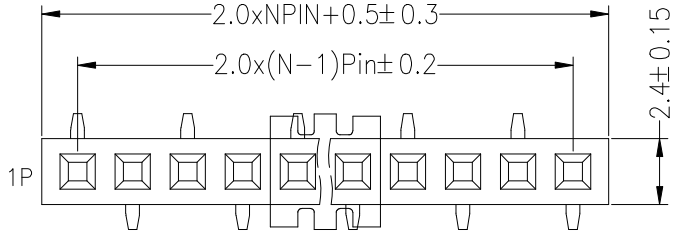

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

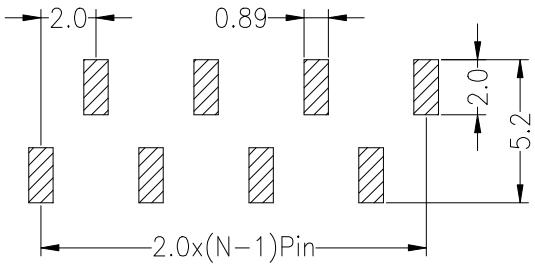

TYPE 1

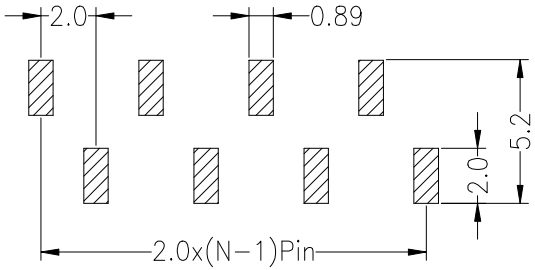



TYPE 2

Ordering Information

2343 01 XX X N XX M U X 0X

- XX — No.of Pins 2−40
- X — Insulator Material Option: C=BK−PA6T; E=BK−PA9T; F=BK−LCP
- N — Post: N=W/O Post
- XX — Contact Plating: G1:Gold Flash; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; S0:Gold Flash/Tin; SN:Tin
- M — Packing: A=Tray; T=Tube; P=Tube+Cap; R=Reel+Cap; M=Reel+Mylar
- U — code stream: 01~99

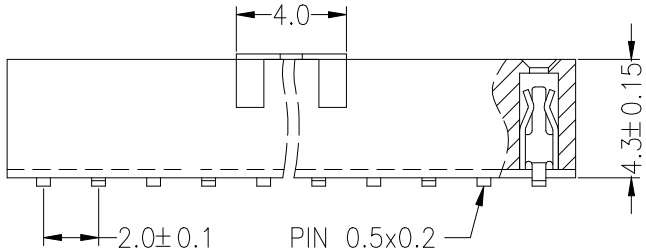



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020.06.02	NEW DRAWING	

OPERATION		DRAW	Liu Miao	20.06.02
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	234301XXXNXXMUX0X
TITLE:	2.0PF H4.3mm 1xNpin SMT W4.2