

HSF RoHS


FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

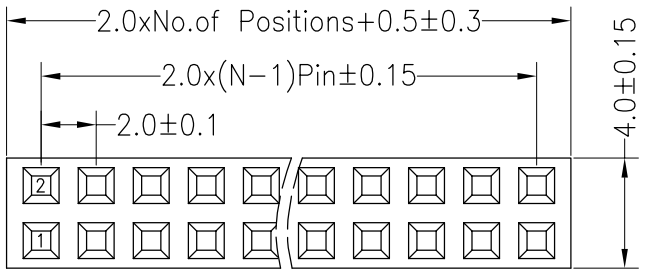

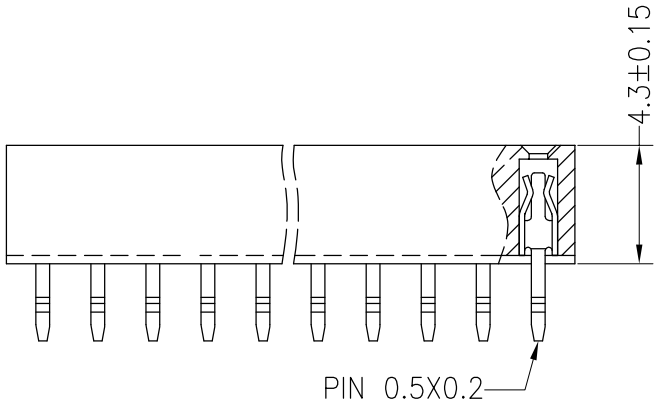





Ordering Information

2343 -02 XX X N XX K U X 01

No.of Pins Per Row 2*1~2*40	Insulator Material Option	Contact Plating	Packing
	A=BK−PBT	G0:Gold Flash	T=Tube
	C=BK−PA6T	G1:3U" Gold	P=Tube+Cap
	D=BK−PA46	G2:5U" Gold	R=Reel+Cap
	E=BK−PA9T	G3:10U" Gold	M=Reel+Mylar
	F=BK−LCP	G4:15U" Gold	
		G5:30U" Gold	
		S0:Gold Flash/Tin	
		SN:Tin	

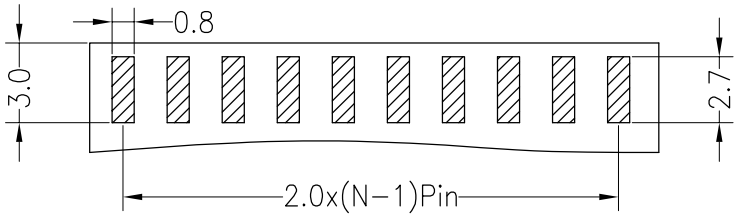



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.10.31	NEW DRAWING	

OPERATION		DRAW	Liu Miao	19.10.31	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	234302XXXNXXKUX01
TITLE:	2.0PF H4.3mm 2xNpin 180° W4.0 夹板式