
HSF RoHS


FILE NO :E362810


SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

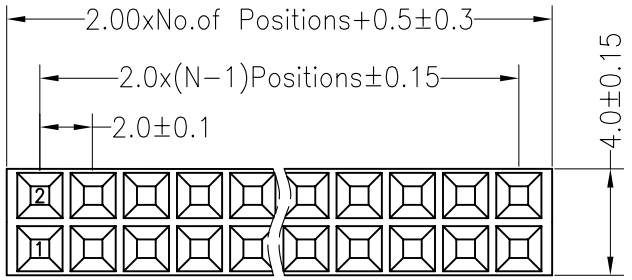

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

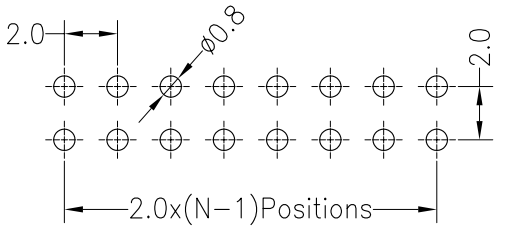

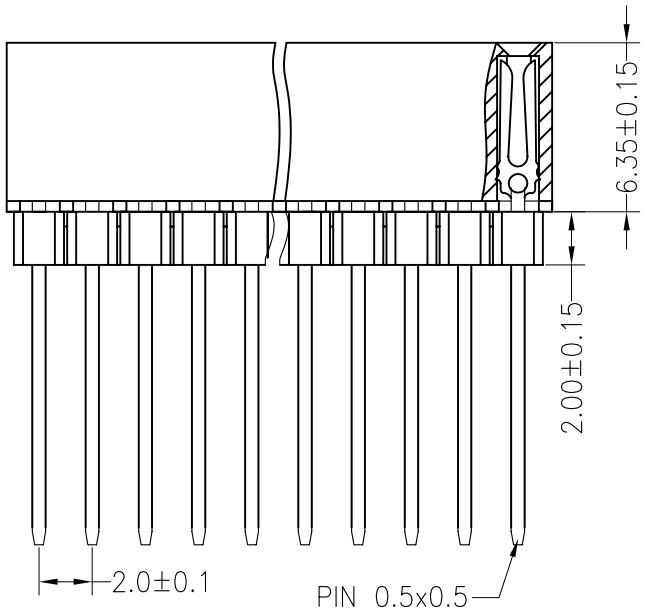

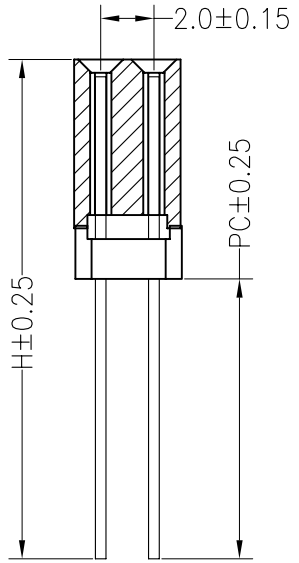

Ordering Information

2363D 2 XX X N G1 S Y X 02

No.of Pins Per Row 2*40	Insulator Material Option	Contact Plating	Packing
	A=BK−PBT	G1:1U" Gold	0=PE Bag
	B=BK−PA66	G2:1.5U" Gold	A=Tray
	C=BK−PA6T	G3:2U" Gold	T=Tube
	D=BK−PA46	G4:3U" Gold	P=Tube+Cap
	E=BK−PA9T	G5:5U" Gold	R=Reel+Cap
	F=BK−LCP	S0:Gold Flash/Tin	M=Reel+Mylar
		SN:Tin	

Dimension antitheses list		
ITEM	PC	H
Standard	13.00	21.35
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.18	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	12.04.18
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	2363D2XXXNXXSYX02
TITLE:	2.00PF H6.35mm+H2.0mm Plastic 2xNpin 180°