
HSF RoHS


FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°C to +105°C

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

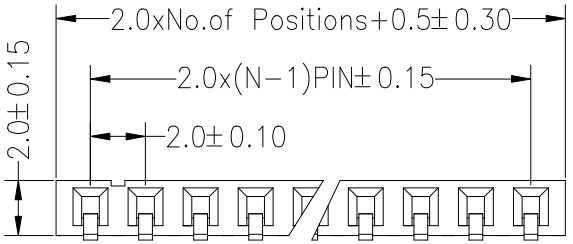


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

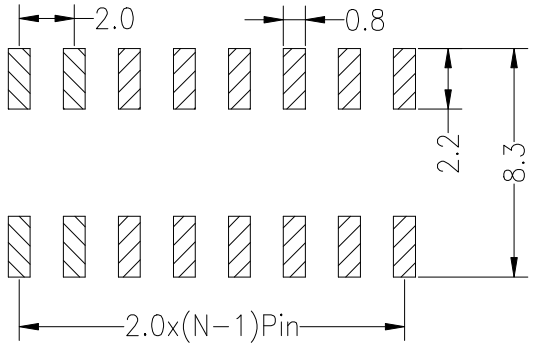


Ordering Information

2345 01 XX X N XX M U X 0X

- XX: No.of Pins 2−40
- X: Insulator Material Option
  - C=BK−PA6T
  - E=BK−PA9T
  - F=BK−LCP
- XX: Contact Plating
  - G1:Gold Flash
  - G3:2U" Gold
  - G4:3U" Gold
  - G5:5U" Gold
  - G6:10U" Gold
  - G7:15U" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- X: Packing
  - 0=PE Bag
  - A=Tray
  - T=Tube
  - R=Reel

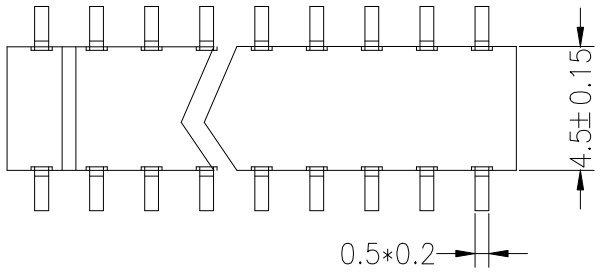



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.07.10	NEW DRAWING	

OPERATION		DRAW	Liu Miao	19.07.10
X.X	± 0.30			
X.XX	± 0.20	CHECK		
X.XXX	± 0.10			
Angle	± 3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	234501XXXNXXMUX0X
TITLE:	2.00PF H4.5mm 1xNpin SMT Side Entry