


HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

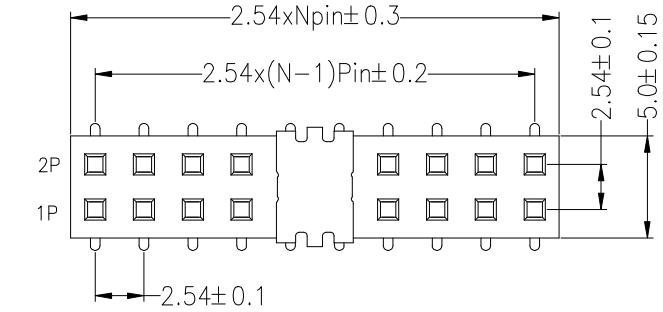

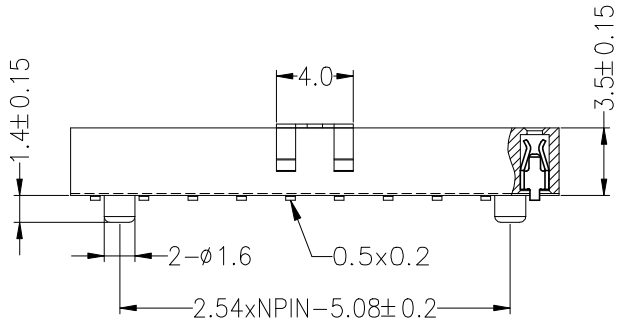


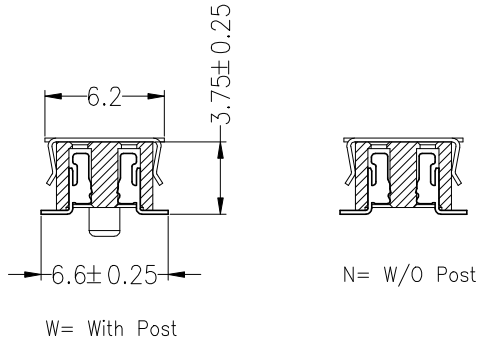

## Ordering Information

2235 02 XX X X XX M U X 0X

- No.of Pins Per Row: 2~40
- Insulator Material Option: C=BK−PA6T; E=BK−PA9T; F=BK−LCP
- Post: W=With Post; N=W/O Post
- Contact Plating: G1:Gold Flash; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; S0:Gold Flash/Tin; SN:Tin
- Packing: A=Tray; T=Tube; P=Tube+Cap; R=Reel+Cap; M=Reel+Mylar

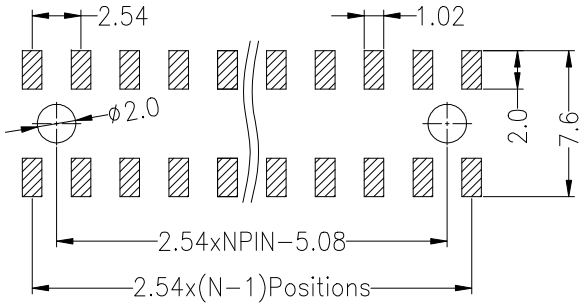


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|---|---|---|---|
| A0 | 2021.04.07 | NEW DRAWING | |

| OPERATION | | DRAW | Liu Miao | 21.04.07 | SCALE | FIT |
|---|---|---|---|---|---|---|
| X.X | ± 0.30 | | | | UNIT | mm |
| X.XX | ± 0.20 | CHECK | | | SIZE | A4 |
| X.XXX | ± 0.10 | | | | SHEET | 1/1 |
| Angle | ± 3° | APPROVE | | | PROJ. | |
| DIM | TOL | | | | | |

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

| PART NO. | 223502XXXXXXMUX0X |
|---|---|
| TITLE: | 2.54PF H3.5mm 2xNpin SMT 带夹持盖 |