
HSF RoHS


FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

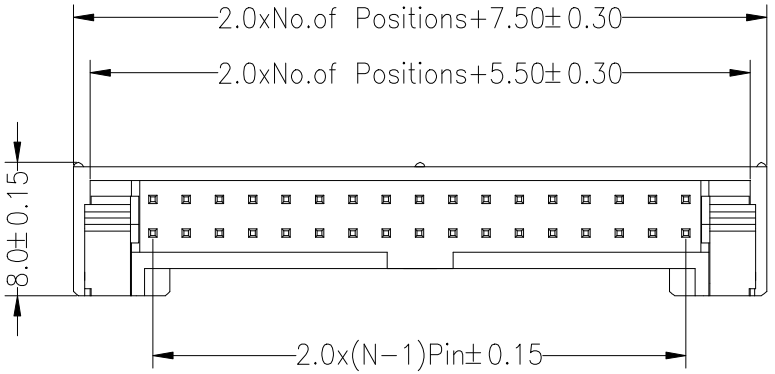


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

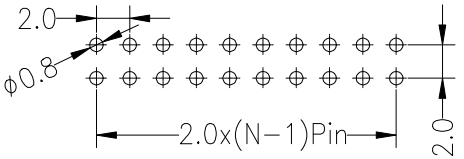

DIMENSIONS	H	M
Long latch	20.20	12.80
Short latch	16.20	8.80

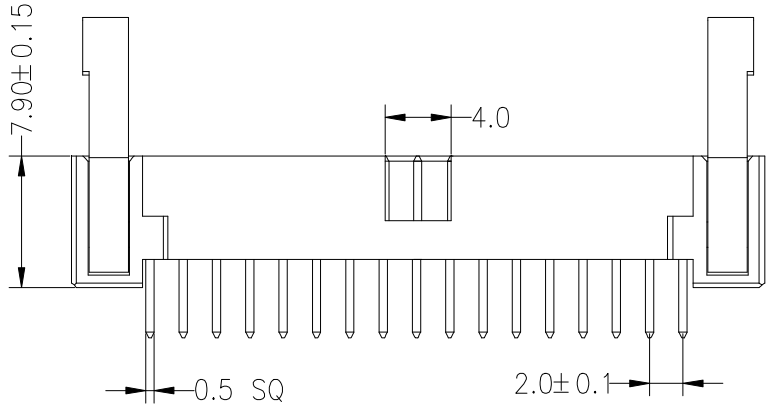

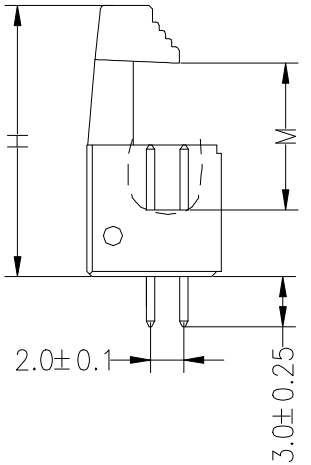

Ordering Information

3225 XX S XX X B K00 X X 01

- No.of Pins: 6−−64
- Contact Plating: G0:Gold Flash; G1:3U" Gold; G2:5U" Gold; G3:10U" Gold; G4:15U" Gold; G5:30U" Gold; S0:Gold Flash/Tin
- Insulator Material Option: A=BK−PBT; B=BK−PA66; C=BK−PA6T; D=BK−PA46; E=BK−PA9T; F=BK−LCP
- Latch Type: L=Long Latch; S=Short Latch
- Packing: A=Tray; T=Tube; P=Tube+Cap; R=Reel+Cap

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2016.07.20	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	16.07.20
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD 深圳市旺富达电子有限公司
CONN SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	3225XXSXXXBK00XX01
TITLE:	2.0mm Box Header 180° Npin H7.9 With Latch