

HSF RoHS FILE NO:E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

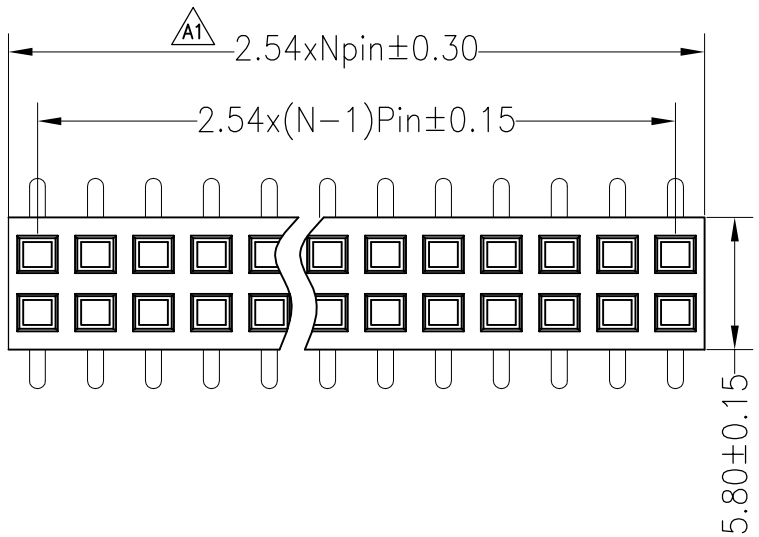

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

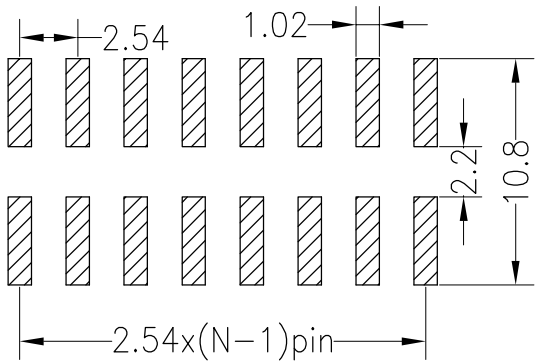


Ordering Information

2268 02 XX X N XX M O X 01

- No.of Pins Per Row: 2*40
- Insulator Material Option: A=BK−PBT; B=BK−PA66; C=BK−PA6T; D=BK−PA46; F=BK−LCP
- Contact Plating: G1:Gold Flash; G2:1.5U" Gold; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; S0:Gold Flash/Tin; SN:Tin
- Packing: 0=PE Bag; A=Tray; T=Tube; P=Tube+Cap; R=Reel+Cap; M=Reel+Mylar





REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2019.06.15	取消总长+0.5	
A0	2012.03.28	NEW DRAWING	

OPERATION		DRAW	Liu Miao	19.06.15
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD 深圳市旺富达电子有限公司
CONN SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	226802XXXNXXMOX01
TITLE:	2.54PF 2xNPin H6.8 W5.8 SMT