

HSF RoHS FILE NO :E362610

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 230℃±5° 5S

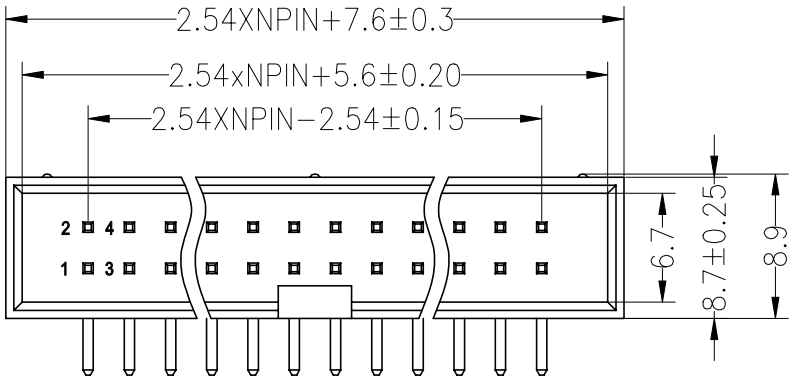


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

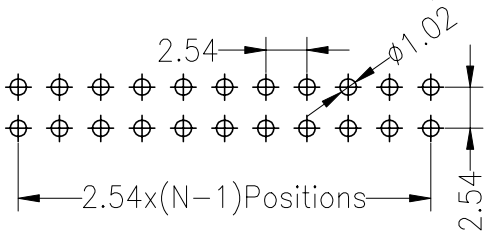


Ordering Information

3210- XX R XX X B K00 X 02

- No.of Pins: 6--64
- Contact Plating: G0:Gold Flash; G1:1U" Gold; G2:1.5U" Gold; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; G6:10U" Gold; G7:15U" Gold; S0:Gold Flash/Tin; SN:Tin
- Insulator Material Option: A=BK−PBT; B=BK−PA66; C=BK−PA6T; D=BK−PA46; E=BK−PA9T; F=BK−LCP
- Packing: 0=PE Bag; A=Tray; T=Tube; P=Tube+Cap

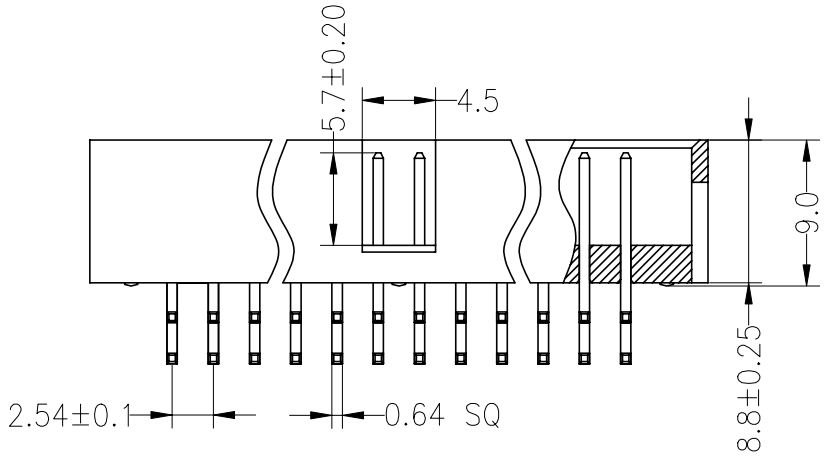

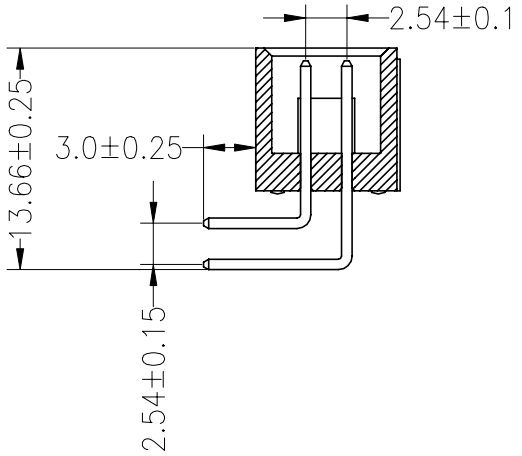

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
B	2013.08.15	变更产品针长,将原来的L=16.5/21.5改成,L=16.0/21.0	YIYUSHENG
A	2012.09.10	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	13.08.15
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	3210−XXRXXXBK00X02
TITLE:	△B 2.54mm Box Header H8.8mm 90° 反弯