HSF RoHS

FILE NO :E362810

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:−40°c to +105°c


Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V−0)

Standard: PA6T


Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

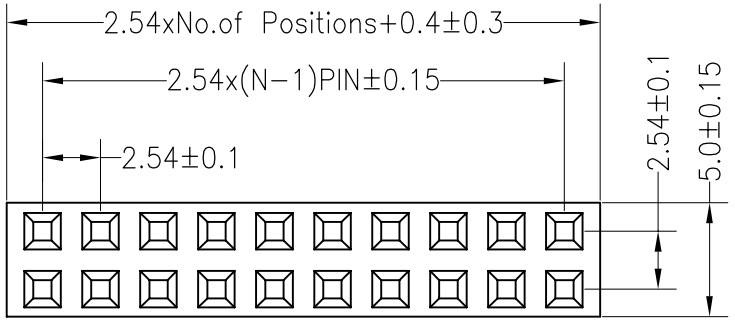


Ordering Information

2271 C2 XX X N XX C U X 01

No.of Pins Per Row 2*40	Insulator Material Option A=BK−PBT B=BK−PA66 C=BK−PA6T D=BK−PA46 E=BK−PA9T F=BK−LCP	Post W=With Post N=W/O Post	Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	Packing A=Tray T=Tube 0=Pe bag	

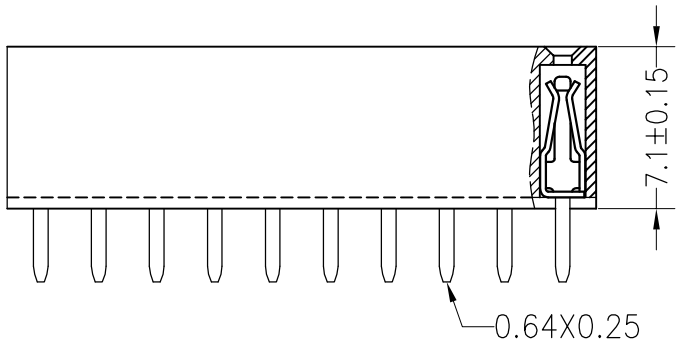

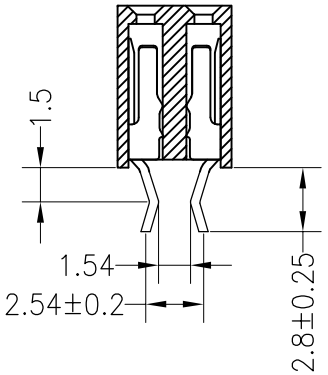

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.06.17	NEW DRAWING	

OPERATION		DRAW	Liu Miao	19.06.17	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	2271C2XXXNXXCUX01
TITLE:	2.54PF 2xNPin H7.1 W5.0 满底端子 夹板式