

HSF RoHS FILE NO:E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

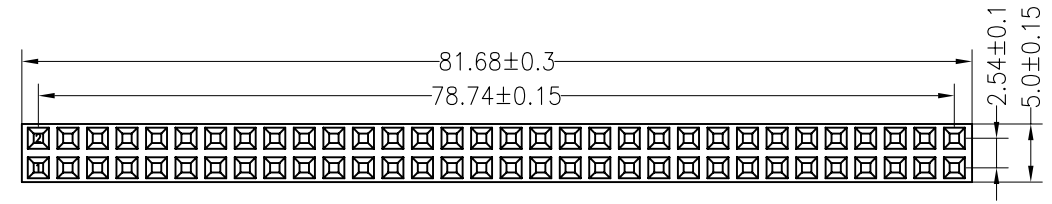


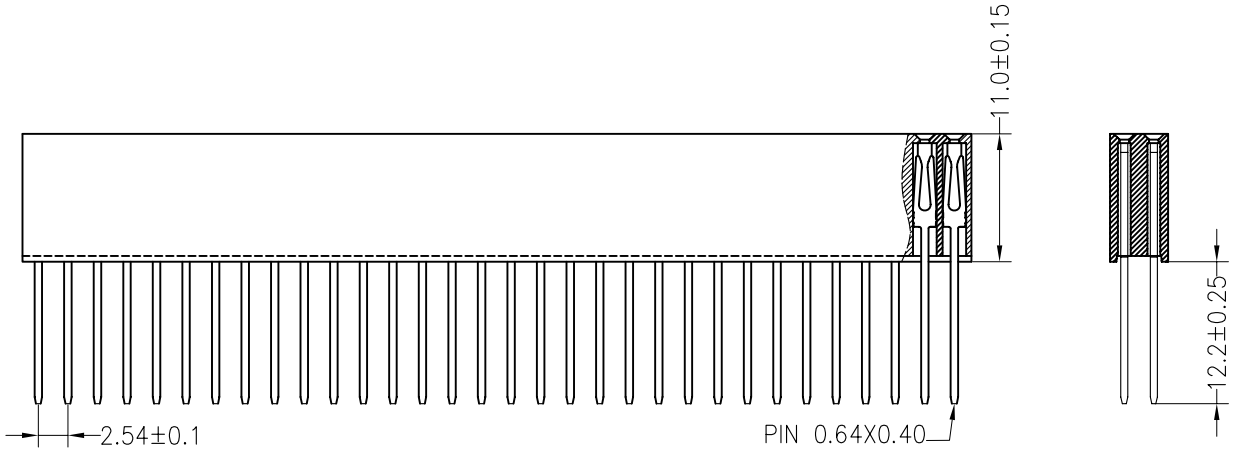

Ordering Information

2211 02 32 X N XX S Y X 01

- 2211 02 32 — No.of Pins 2*32
- X — Insulator Material Option
  - A=BK−PBT
  - B=BK−PA66
  - C=BK−PA6T
  - D=BK−PA46
  - E=BK−PA9T
  - F=BK−LCP
- N — Reserved
- XX — Contact Plating
  - G1:Gold Flash
  - G2:1.5U" Gold
  - G3:2U" Gold
  - G4:3U" Gold
  - G5:5U" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- S — Reserved
- Y — Reserved
- X — Post
  - A=Tray
  - T=Tube
  - O=Pe
  - R=Tape&ReeL
  - P=Tube&ReeL
- 01 — Reserved

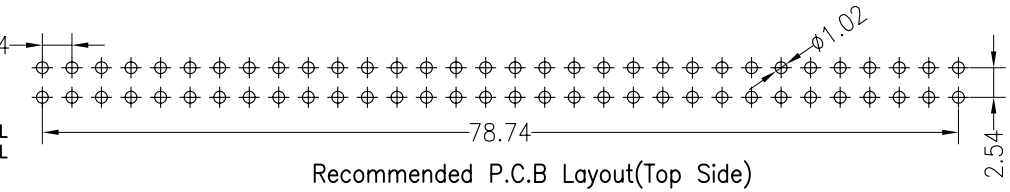

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2017.11.10	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	17.11.10	
CHECK			
APPROVE			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	22110232XNXXSYX01
TITLE:	2.54PF H11.0mm 2x32pin 180° W5.0mm