
HSF RoHS

FILE NO :E362810


SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°C to +105°C

Contact Material:Phosphor bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

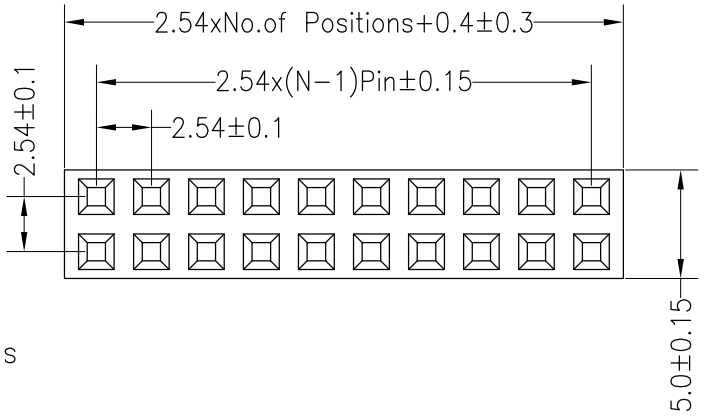


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

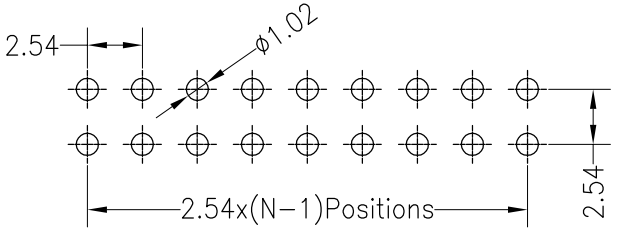


Ordering Information

2271B - 2 XX X XX C X 01

No.of Pins	Insulator Material Option	Contact Plating	Packing
2*1~2*40P	A=BK−PBT B=BK−PA66 C=BK−PA6T D=BK−PA46 E=BK−PA9T F=BK−LCP	G0:1U" Gold G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	A=Tray T=Tube 0=Pe bag

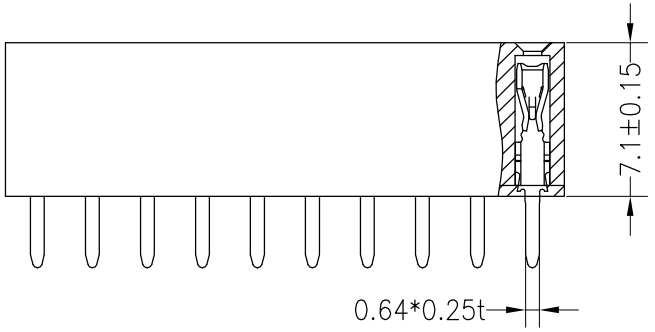



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020.03.10	NEW DRAWING	

OPERATION		DRAW	Liu Miao	20.03.10	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	2271B−2XXXXXCX01
TITLE:	新一代智能电表连接器插座 2.54排母 H7.1mm 0端青蛙脚