

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

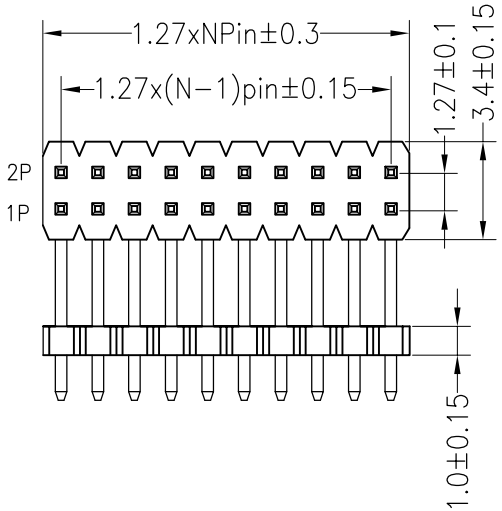


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

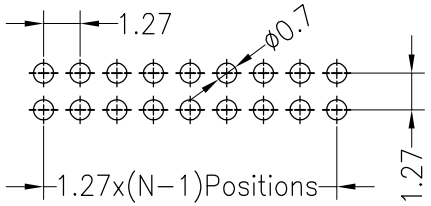


Ordering Information

1410 22 XX X N XX R XXX X 0X

- No.of Pins Per Row: 02~50P
- Insulator Material Option: A=BK−PBT; C=BK−PA6T; D=BK−PA46; E=BK−PA9T; F=BK−LCP
- Contact Plating: G0:Gold Flash; G1:1U" Gold; G2:1.5U" Gold; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; G6:10U" Gold; G7:15U" Gold; S0:Gold Flash/Tin; SN:Tin
- Pin Length
- Packing: 0=PE Bag; A=Tray; T=Tube; P=Tube+Cap; R=Reel+Cap

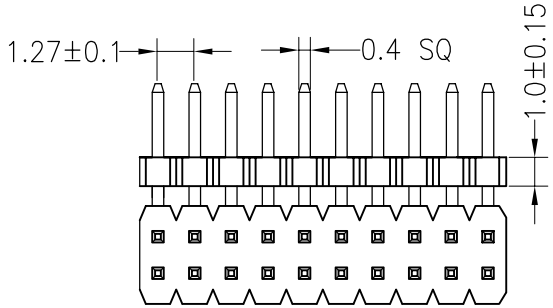

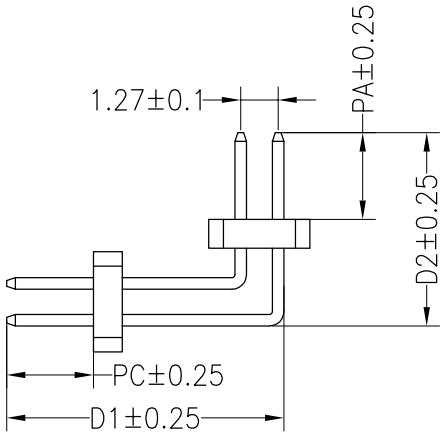

Dimension antitheses list						
ITEM	PA	D2	PC	D1	L短	L长
Standard	3.00	6.70	3.00	9.60	13.00	15.50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.06.09	NEW DRAWING	

OPERATION		DRAW	Liu Miao	19.06.09	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	141022XXXNXXRXXXX0X
TITLE:	1.27PH 2xNPin H1.0 双塑 90°