

HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

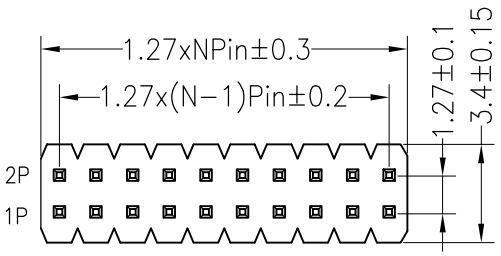

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

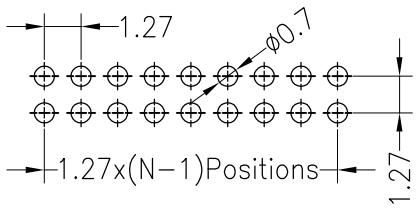

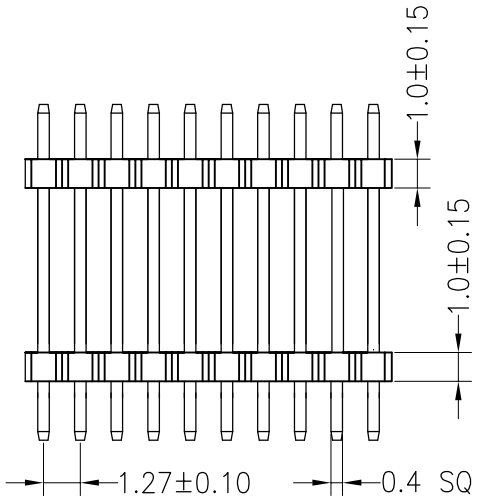

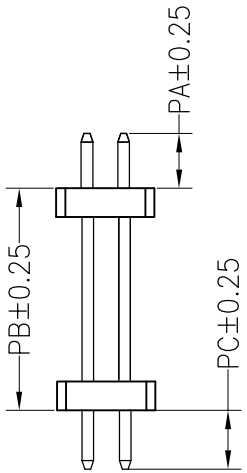

Ordering Information

1410 22 XX X N XX S XXX X 01

- No.of Pins Per Row: 02~50P
- Insulator Material Option: A=BK−PBT; C=BK−PA6T; D=BK−PA46; E=BK−PA9T; F=BK−LCP
- Contact Plating: G1:1U" Gold; G2:1.5U" Gold; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; G6:10U" Gold; G7:15U" Gold; S0:Gold Flash/Tin; SN:Tin
- Pin Length
- Packing: 0=PE Bag; A=Tray; T=Tube; P=Tube+Cap; R=Reel+Cap; M=Reel+Mylar

Dimension antitheses list				
ITEM	PA	PC	PB	L
Standard	3.00	3.00	10.00	16.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1			
A0	2019.10.29	NEW DRAWING	

OPERATION		DRAW	Liu Miao	19.10.29
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	141022XXXNXXSXXXX01
TITLE:	1.27PH 2xnPin H1.0 180° 非平面胶芯