

HSF RoHS FILE NO:E362810


SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

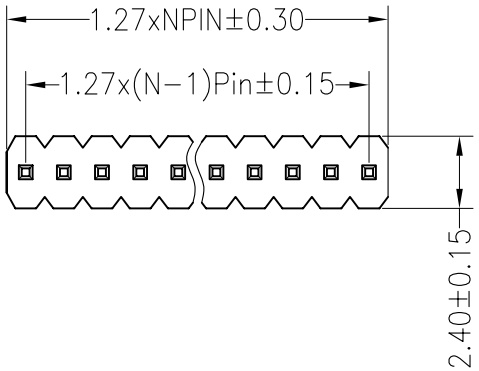

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

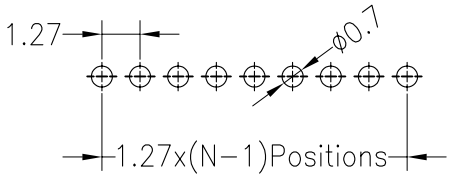

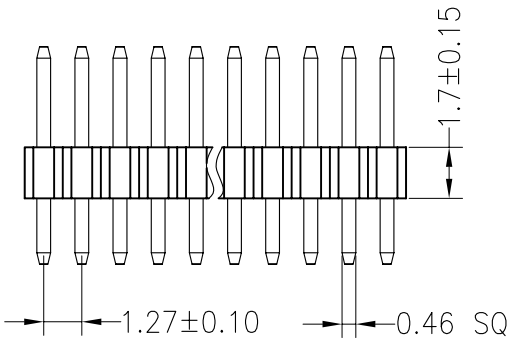

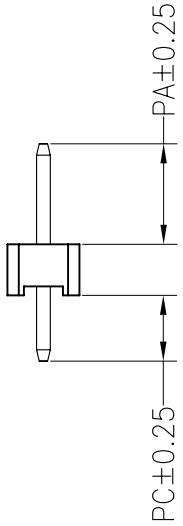

Ordering Information

1417 11 XX X N XX S XXX X 01

- No.of Pins Per Row: 1−50
- Insulator Material Option: A=BK−PBT, B=BK−PA66, C=BK−PA6T, D=BK−PA46, F=BK−LCP
- Contact Plating: G1:1U" Gold, G2:1.5U" Gold, G3:2U" Gold, G4:3U" Gold, G5:5U" Gold, S0:Gold Flash/Tin, SN:Tin
- Pin Length
- Packing: 0=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

Dimension antitheses list			
ITEM	PA	PC	L
Standard	2.75	2.75	7.20
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2013.03.28	NEW DRAWING	

OPERATION		DRAW	Liu Miao	13.03.28
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	141711XXXNXXSXXX01
TITLE:	1.27PH H1.7mm 1xNpin 180°