

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

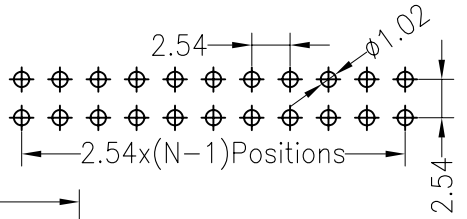


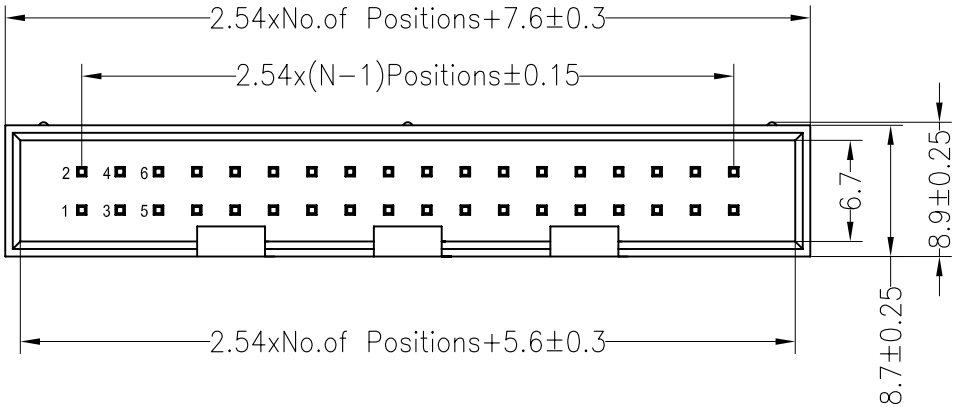

Ordering Information

3210- XX S XX X B K00 X 02

- XX — No.of Pins Per Row: 60,64P
- S
- XX — Contact Plating: G0:Gold Flash; G1:3U" Gold; G2:5U" Gold; G3:10U" Gold; G4:15U" Gold; G5:30U" Gold; S0:Gold Flash/Tin; SN:Tin
- X — Insulator Material Option: A=BK−PBT; B=BK−PA66; C=BK−PA6T; D=BK−PA46; F=BK−LCP
- B K00
- X — Packing: 0=PE Bag; A=Tray; T=Tube; P=Tube+Cap
- 02

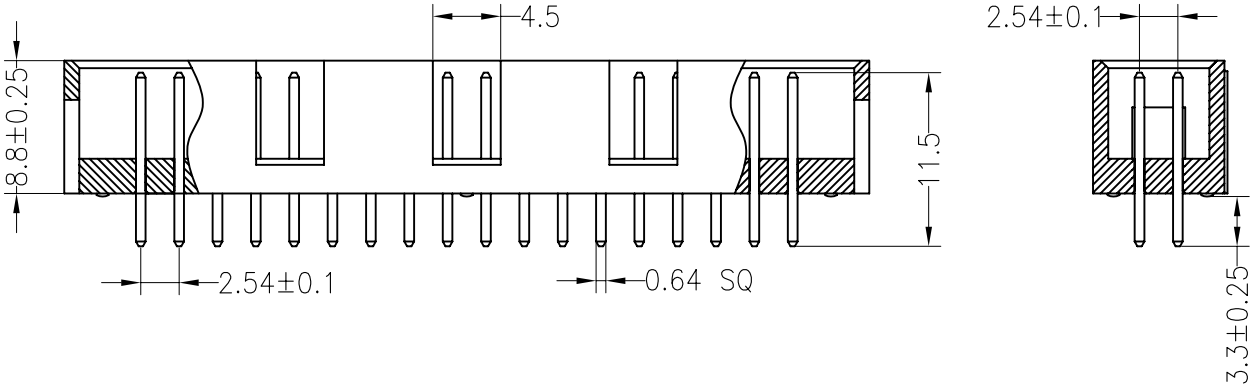

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	12.03.28
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	3210−XXSXXXBK00X02
TITLE:	2.54DC3−60P/64P H8.8mm 180°三缺口