


HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Soldering temperature: 260°C±5° 5S

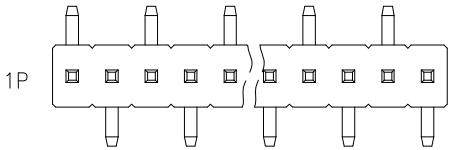


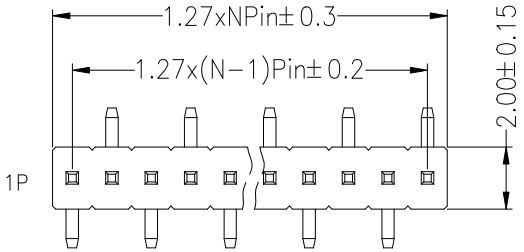


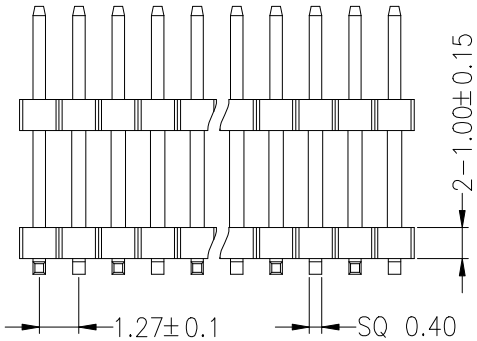

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

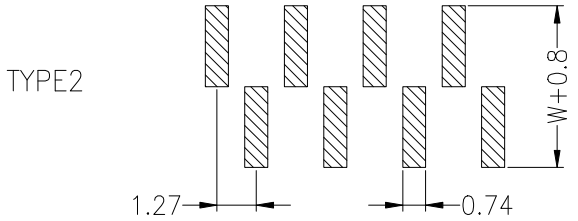

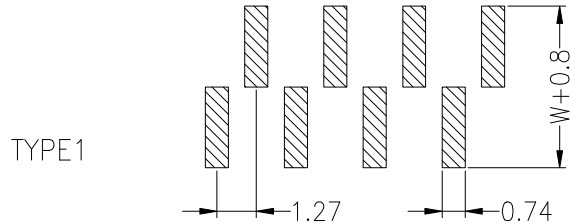

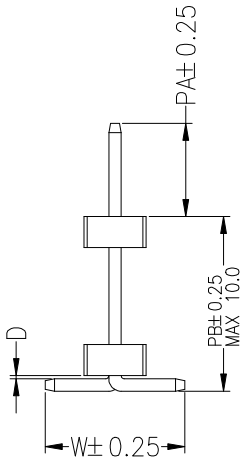

Ordering Information

1410 21 XX X N XX M XXX X 0X

- XX — No.of Pins 2−50
- X — Insulator Material Option: C=BK−PA6T; E=BK−PA9T; F=BK−LCP
- XX — Contact Plating: G1:Gold Flash; G2:1.5U" Gold; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; G6:10U" Gold; G7:15U" Gold; SN:Tin
- XXX — Pin Length
- X — Packing: A=Tray; T=Tuber; P=Tuber+Cap; R=Reel+Cap

Dimension antitheses list				
ITEM	PA	PB	D	W
Standard	XXX	XXX	0.10	4.50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.05.11	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	22.05.11
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	141021XXXNXXMXXX0X
TITLE:	1.27PH Single Row Double Plastic SMT