

HSF RoHS FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

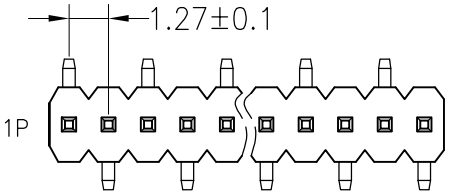


TYPE2

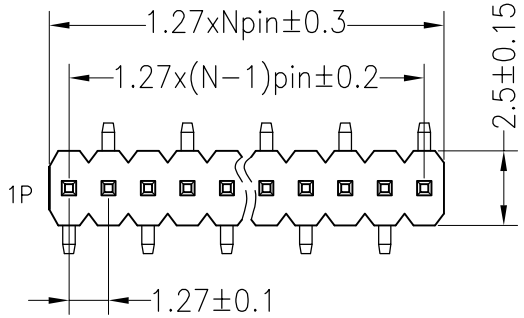


TYPE1

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

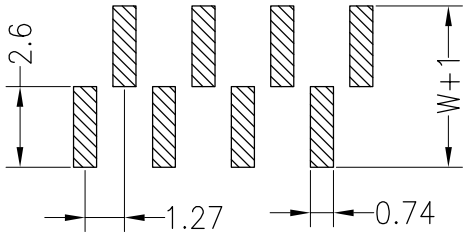

TYPE1

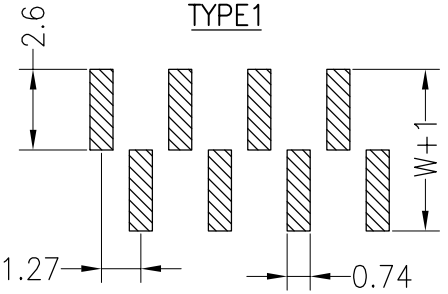



TYPE2

Ordering Information

1415 11 XX X N XX M XXX X 01

- No.of Pins Per Row: 1*50
- Insulator Material Option: A=BK−PBT; C=BK−PA6T; D=BK−PA46; E=BK−PA9T; F=BK−LCP
- Contact Plating: G1:1U" Gold; G2:1.5U" Gold; G3:2U" Gold; G4:3U" Gold; G5:5U" Gold; S0:Gold Flash/Tin; SN:Tin
- Pin Length
- Packing: 0=PE Bag; A=Tray; T=Tube; P=Tube+Cap; R=Reel+Cap; M=Reel+Mylar

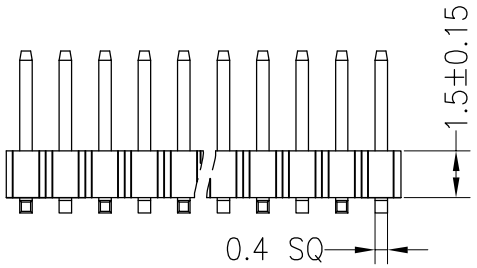

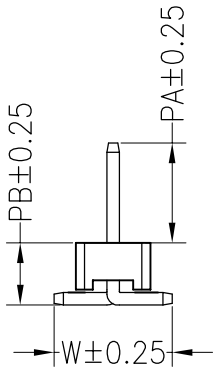

Dimension antitheses list				
ITEM	PA	PB	W	L
Alternate	4.00	1.90	4.40	7.70

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.08.28	NEW DRAWING	

OPERATION		DRAW	Liu Miao	12.08.28
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	141511XXXNXXMXXXX01
TITLE:	1.27PH H1.5mm 1xNpin SMT