
HSF RoHS


FILE NO :E362810

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: LCP
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

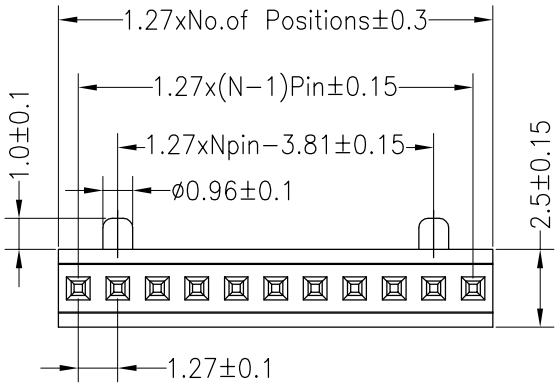


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

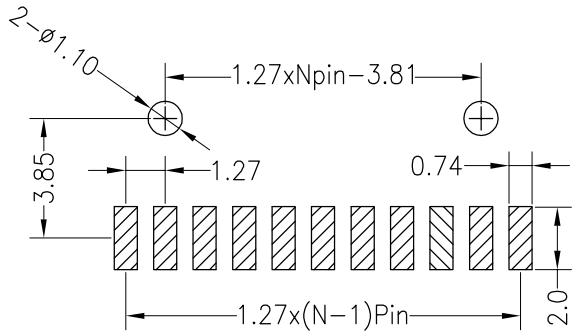


Ordering Information

1430 11 XX F W XX Z XXX X 01

- No.of Pins Per Row 1*1~1*25
- Insulator Material Option
  A=BK−PBT
  B=BK−PA66
  C=BK−PA6T
  D=BK−PA46
  E=BK−PA9T
  F=BK−LCP
- Contact Plating
  G0:Gold Flash
  G1:3U" Gold
  G2:5U" Gold
  G3:10U" Gold
  G4:15U" Gold
  G5:30U" Gold
  S0:Gold Flash/Tin
  SN:Tin
- Pin Length
- Packing
  A=Tray
  T=Tube
  P=Tube+Cap
  R=Reel+Cap
  M=Reel+Mylar

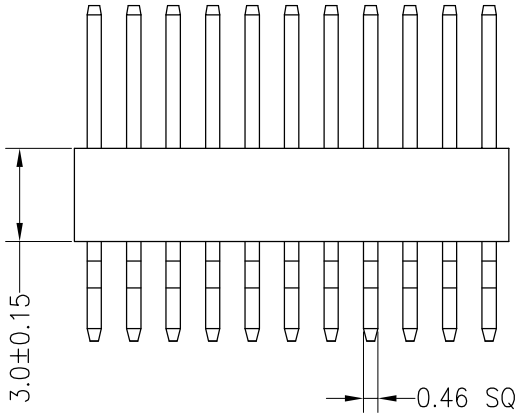

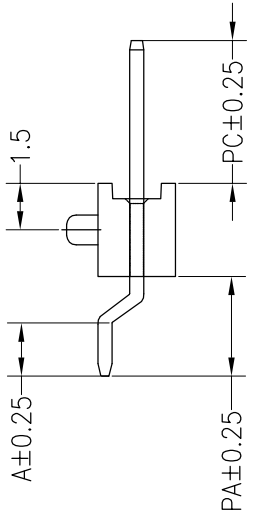

Dimension antitheses list				
ITEM	PA	A	PC	L
Standard	3.20	1.70	4.60	11.2
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2017.03.18	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	17.03.18
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	143011XXFWXXZXXXX01
TITLE:	1.27PH H3.0mm 1xNpin 90° SMT