

HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

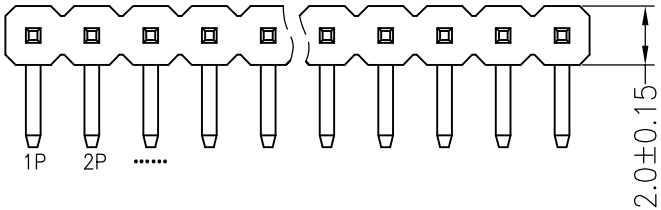

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

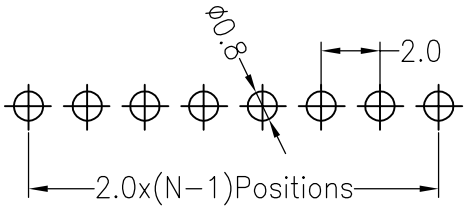

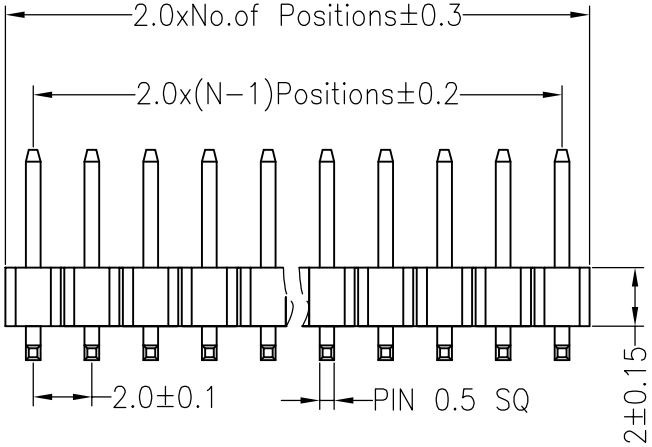

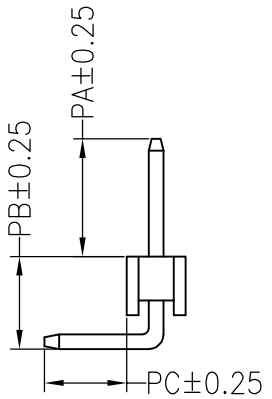

Ordering Information

1320 11 XX X N XX R XXX X 01

No.of Pins Per Row 1x40 1--40	Insulator Material Option	Contact Plating	Pin Length	Packing
	A=BK-PBT	G0:Gold Flash		0=PE Bag
	C=BK-PA6T	G1:1U" Gold		A=Tray
	D=BK-PA46	G2:1.5U" Gold		T=Tube
	E=BK-PA9T	G3:2U" Gold		P=Tube+Cap
	F=BK-LCP	G4:3U" Gold		R=Reel+Cap
		S0:Gold Flash/Tin		M=Reel+Mylar
		SN:Tin		

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	4.00	3.15	2.80	10.50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.10.10	NEW DRAWING	

OPERATION		DRAW	Liu Miao	12.10.10
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	1320-11XXXNXXRXXXX01
TITLE:	2.0PH 1xNpin H2.0mm Single 90°