

HSF RoHS FILE NO :E362810


SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

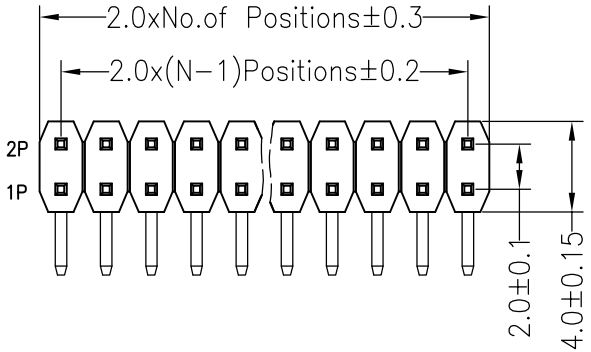

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

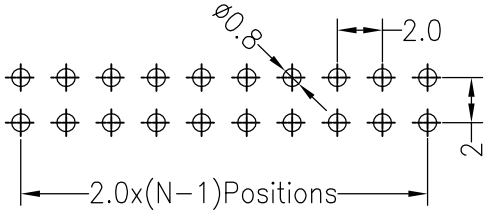

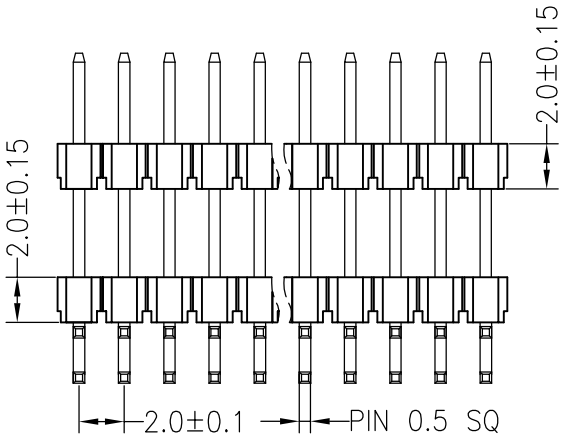

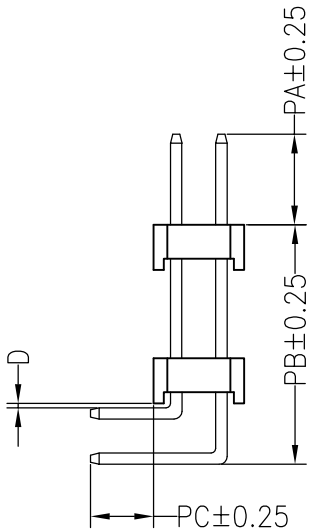

Ordering Information

1320 2 2 XX X N XX R XXX X 01

No.of Pins Per Row	Insulator Material Option	Contact Plating	Pin Length	Packing
1x40 2x40 1−−40 2−−80	A=BK−PBT C=BK−PA6T D=BK−PA46 E=BK−PA9T F=BK−LCP	G0:Gold Flash G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold S0:Gold Flash/Tin SN:Tin		A=Tray T=Tube O=Pe R=Tape&ReeL P=Tube&ReeL

Dimension antitheses list						
ITEM	PA	PB	PC	D	L短	L长
Alternate	4.00	6.70	2.80	0.10	12.00	16.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.09.19	NEW DRAWING	

OPERATION		DRAW	Liu Miao	19.09.19
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	132022XXXNXXRXXXX01
TITLE:	2.0PH 2xNpin 2+H2.0mm 90°