

HSF RoHS FILE NO:E362610


SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c


Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

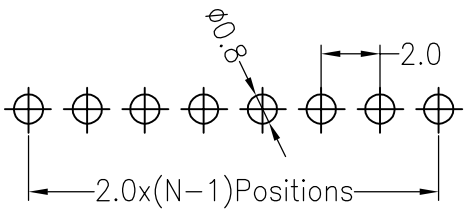

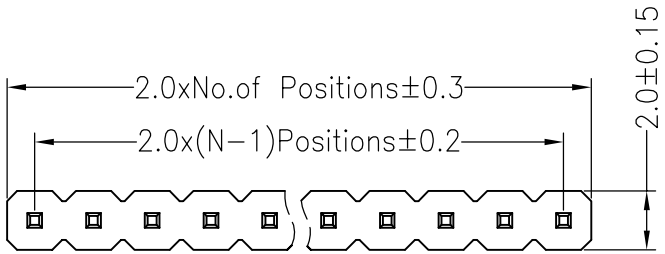

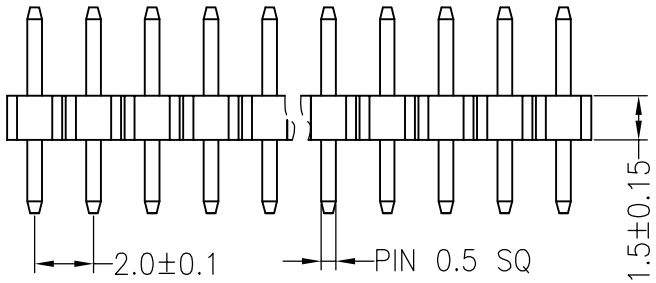

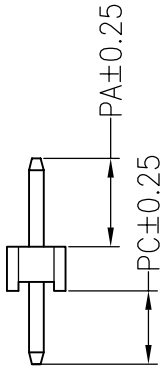

Ordering Information

1315 11 XX X N XX S XXX X 01

No.of Pins Per Row	Insulator Material Option	Contact Plating	Pin Length	Packing
1x40	A=BK−PBT	G0:Gold Flash		0=PE Bag
2x40	C=BK−PA6T	G1:1U" Gold		A=Tray
3x40	D=BK−PA46	G2:1.5U" Gold		T=Tube
1−−40	E=BK−PA9T	G3:2U" Gold		P=Tube+Cap
2−−80	F=BK−LCP	G4:3U" Gold		R=Reel+Cap
3−−120		G5:5U" Gold		M=Reel+Mylar
		S0:Gold Flash/Tin		
		SN:Tin		

Dimension antitheses list			
ITEM	PA	PC	L
Standard	3.50	3.20	8.20

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.09.19	NEW DRAWING	

OPERATION		DRAW	Liu Miao	19.09.19
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	131511XXXNXXSXXXX01
TITLE:	2.0PH 1xNpin H1.5mm Single 180°