
HSF RoHS


FILE NO :E362810


SPECIFICATIONS
Rated Current: 1.5AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40°c to +105°c


Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5−10 seconds)

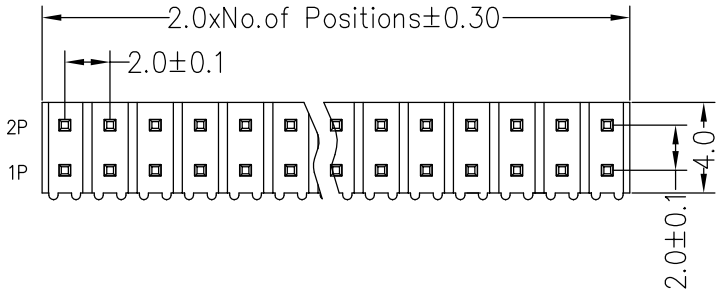

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

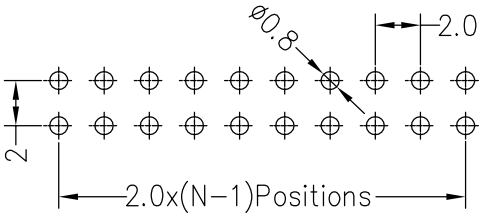

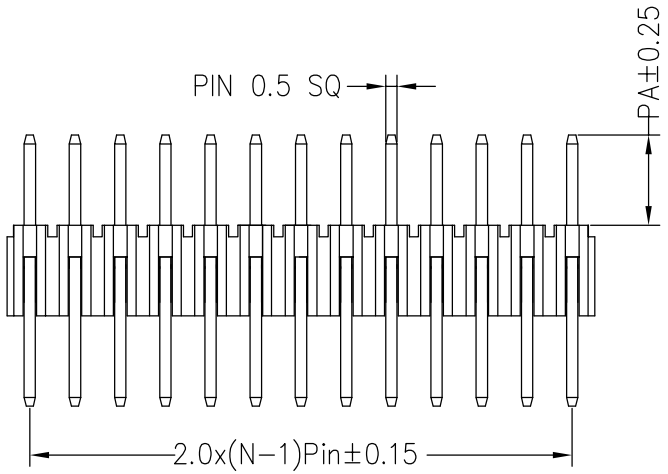

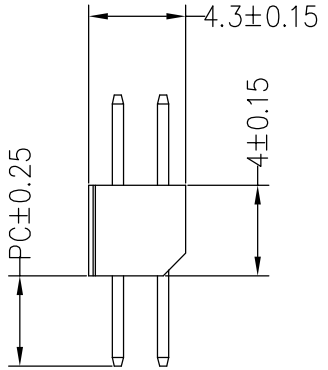

Ordering Information

134012 XX X N XX S XXX X 01

No.of Pins Per Row	Insulator Material Option	Contact Plating	Pin Length	Packing
2x40 2−−80	A=BK−PBT B=BK−PA66 C=BK−PA6T D=BK−PA46 E=BK−PA9T F=BK−LCP	G0: Gold Flash G2: 1.5U" Gold G3: 3U" Gold G4: 5U" Gold G5: 10U" Gold G6: 15U" Gold S0: Gold Flash/Tin SN: Tin		0=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap

Dimension antitheses list			
ITEM	PA	PC	L
Standard	4.00	2.80	10.80
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.11	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	Liu Miao	12.04.11
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

PART NO.	134012XXXNXXSXXXX01
TITLE:	2.0PH 2xNpin H4.0mm 180°