


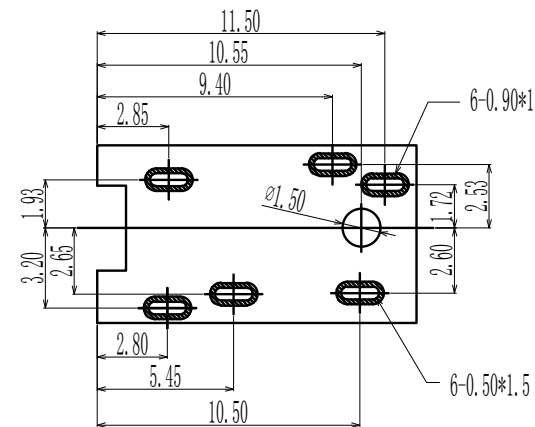


RoHS Compliant

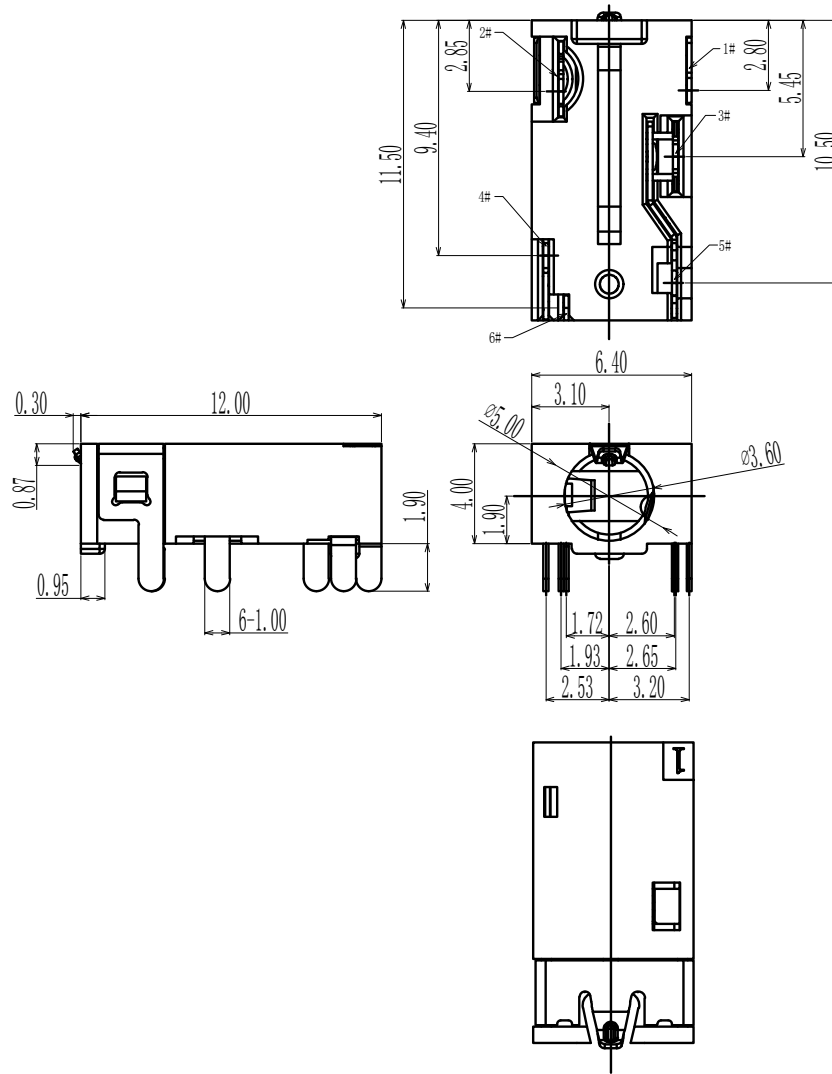

3D VIEW

- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX. ;
- INSULATION RESISTANCE: 100MΩ MIN. ;
- DIELECTRIC WITHSTANDING: 500V AC MIN. ;
- DURABILITY: 5,000 CYCLES MIN. ;
- CONNECTOR MATING FORCES: 30N MAX. ;
- CONNECTOR UNMATING FORCES: 3N MIN. ;



SCHEMATIC

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
7	HOUSING	HIGHT TEMPERATURE PLASTIC COLOR BLACK		1
6	TERMINAL 6#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL_GOLD PLATING	T=0.20mm	1
5	TERMINAL 5#	ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm	1
4	TERMINAL 4#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL_GOLD PLATING	T=0.20mm	1
3	TERMINAL 3#	ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm	1
2	TERMINAL 2#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL_GOLD PLATING	T=0.20mm	1
1	TERMINAL 1#	ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm	1

UNLESS OTHERWISE,
GENERAL TOLERANCE:

X. xxx ±0.10
X. xx ±0.20
X. x ±0.30
X. ±0.50

ANGULAR:

X. xx ±1°
X. x ±3°
X. ±5°

WFDCONN 深圳市旺富达电子有限公司
Shenzhen WFD Electronics Co.Ltd..

TITLE:
Ø3.5mm PHONE JACK
H=4.0mm CONNECTOR

P/N: MPJ-06036-06-G/S-004

MODEL: _____

DRAW NO. : _____

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/1

ECN NO.	REV.	DESCRIPTION	DATE	CHANGE	APPROVAL	DAVID	2018.06.12
N/A	A	NEW DRAWING	2018.06.12	Liu Miao	DESIGN	Liu Miao	2018.06.12
					CHECK	SIMON	2018.06.12
					APPROVAL	DAVID	2018.06.12