
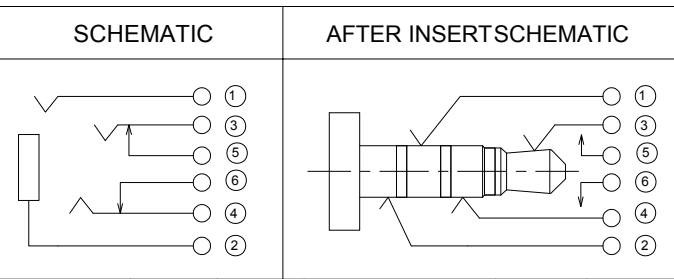


Note:  
 1.Contact Current Rating:12V 1A.  
 2.Contact Resistance:50m Ω MAX.  
 3.Insulation Resistance:100M Ω Min.500V DC.  
 4.Dielectric Withstandance:500V AC Min.  
 5.Durability:5000 Cycles Min.  
 6.Connector Mating Forces:29.4N(3.00Kgf) MAX.  
 7.Connector Unmating Forces:2.94N(0.30Kgf) Min.  
 8.The Product Machine With A GAP That:The Finished Machine With Socket Before/Up/Down/Left/Right Side Of 5,Protection GAP First Proposed,The Desing OF 0.15mm.  
 9.J303B06G1WXL2

O: ORANGE  
 Z: BLACK

RECOMMENDED PCB LAYOUT(TOP VIEW)  
 (GENERAL TOLERANCE ±0.05)

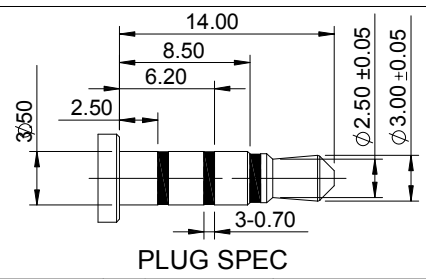

7	HOUSING	HIGH TEMP	BLACK	
6	TERMINAL 6	COPPER ALLOY		Au PLATED
5	TERMINAL 5	COPPER ALLOY		Au PLATED
4	TERMINAL 4	COPPER ALLOY		Au PLATED
3	TERMINAL 3	COPPER ALLOY		Au PLATED
2	TERMINAL 2	COPPER ALLOY		Au PLATED
1	TERMINAL 1	COPPER ALLOY		Au PLATED
NO.	DESCRIPTION	MAT,L	COLOR	REMARK

CUSTOMER COPY WFDconn 深圳市旺富达电子有限公司  
 Shenzhen WFD Electronics Co.Ltd..

TITLE:	Ø3.50 mm PHONE JACK CONNECTOR			
PART NO.	MPJ-06C358-06-G-005			
PRODUCT SPEC.	WFD-RD-W06			
FILE NAME.	MPJ-06C358-06-G-005			
SCALE	4:1	UNIT:mm	A4	SHEET: 1 of 2

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	DESIGN	Liu Miao	03/06/18
	A	03/06/18	A版发行			Angle ±2° X ±0.35 .X ±0.25 .XX ±0.20	CHECK	SIMON	03/06/18
							APPRO.	DAVID	03/06/18