



RoHS Compliant







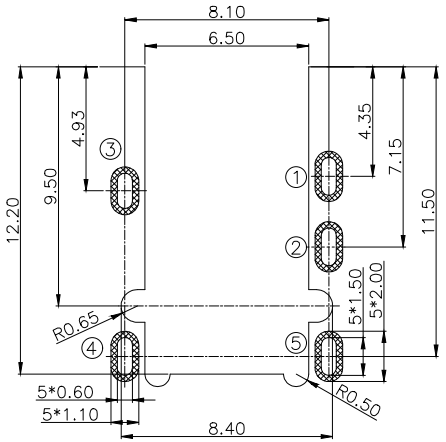



RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

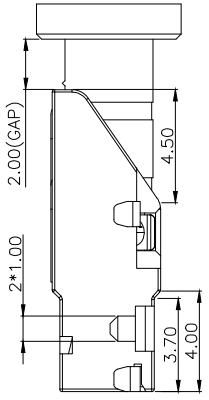

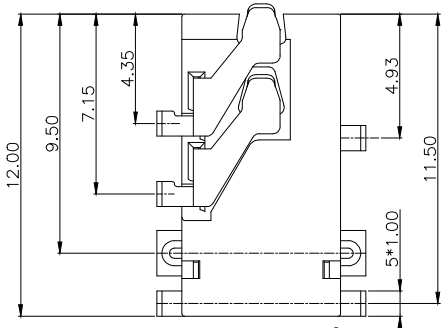





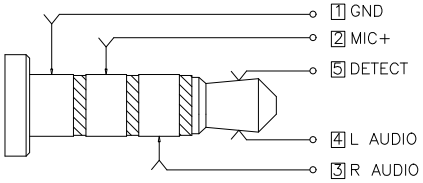

ø3.50 mm PLUG SCHEMETIC

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	HOUSING	HIGH TEMP	BLACK	
5	TERMINAL 5	COPPER ALLOY	Au PLATED	
4	TERMINAL 4	COPPER ALLOY	Au PLATED	
3	TERMINAL 3	COPPER ALLOY	Au PLATED	
2	TERMINAL 2	COPPER ALLOY	Au PLATED	
1	TERMINAL 1	STAINLESS STEEL	Au PLATED	

UNLESS OTHERWISE, GENERAL TOLERANCE:
X.xxx ±0.10
X.xx ±0.20
X.x ±0.30
X. ±0.50
ANGULAR:
X.xx ±1°
X.x ±3°
X. ±5°

WFDCONN 深圳市旺富达电子有限公司 Shenzhen WFD Electronics Co.Ltd..

TITLE: ø3.50mm PHONE JACK CONNECTOR H=4.30mm 正向沉板3.30mm

P/N:MPJ-05O36-05-G-027

MODEL:

DRAW NO.:

THIRD ANGLE PROJECTION

UNIT:	SCALE:	SIZE:	SHEET:
mm	1:1	A4	1/1

					DESIGN	Liu Miao	2018.07.14
					CHECK	SIMON	2018.07.14
N/A	A	NEW DRAWING	2018.07.14	Liu Miao	APPROVAL	DAVID	2018.07.14
ECN NO.	REV.	DESCRIPTION	DATE	CHANGE			