





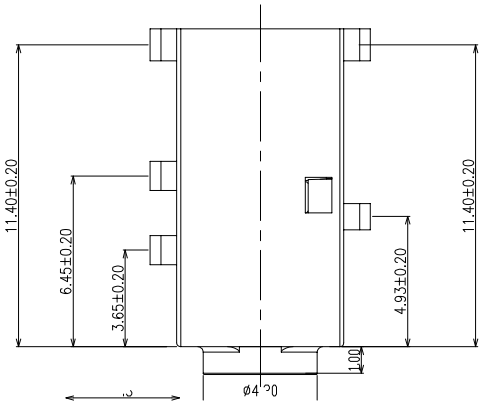


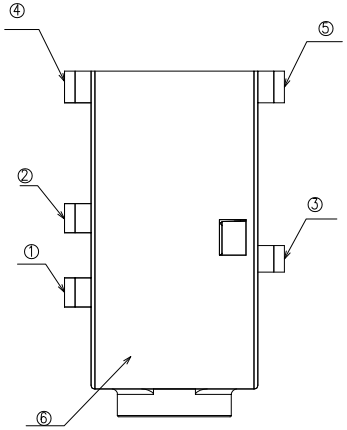



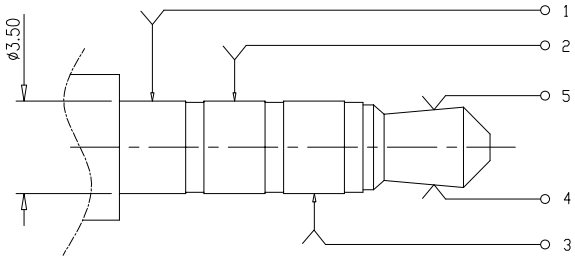

PULG SCHEMATIC

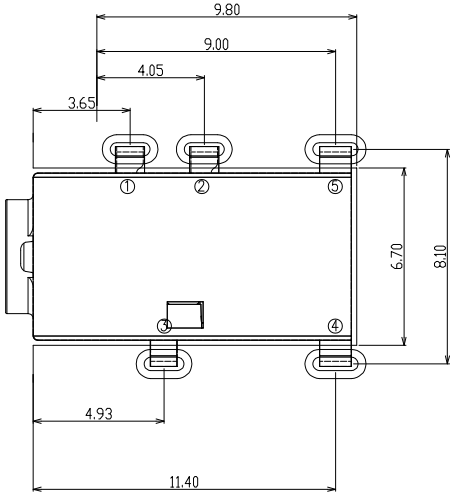

PCB LAYOUT TOP VIEW

NOTES:
1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;

ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK
⑥	HOUSING	1	HIGHT TEMPERATURE PLASTIC		Black
⑤	CONTACT E	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
④	CONTACT D	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
③	CONTACT C	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
②	CONTACT B	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
①	CONTACT A	1	PHOSPHOR BRONZE 0.20T	Gold Flash	

ECN NO.	REV.	DESCRIPTION	DATE	CHANGE
N/A	X	初版发行	2018. 10. 16	Liu Miao

DESIGN	Liu Miao	2018. 10. 16
CHECK	SIMON	2018. 10. 16
APPROVAL	DAVID	2018. 10. 16

UNLESS OTHERWISE, GENERAL TOLERANCE:
X.xxx ±0.10
X.xx ±0.20
X.x ±0.30
X. ±0.35
ANGULAR:
X.xx ±1°
X.x ±3°
X. ±5°

WFDCONN 深圳市旺富达电子有限公司 Shenzhen WFD Electronics Co.Ltd..

TITLE: Ø3.5mm Phone Jack CONN. 客户图

P/N: MPJ-05C35-05-G-028
MODEL: J981-Y 系列
DRAW NO.: ——

THIRD ANGLE PROJECTION

UNIT:	SCALE:	SIZE:	SHEET:
mm	1:1	A4	1/1