



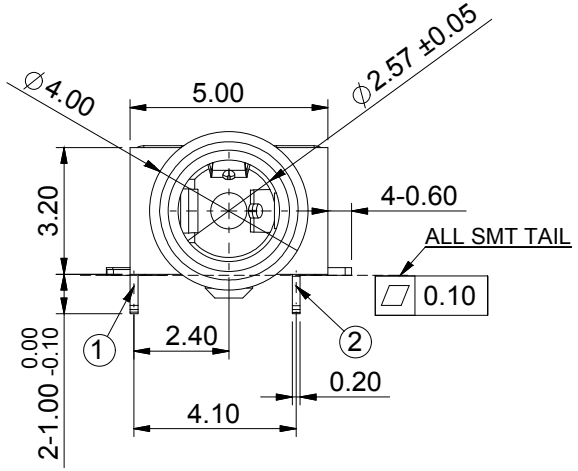


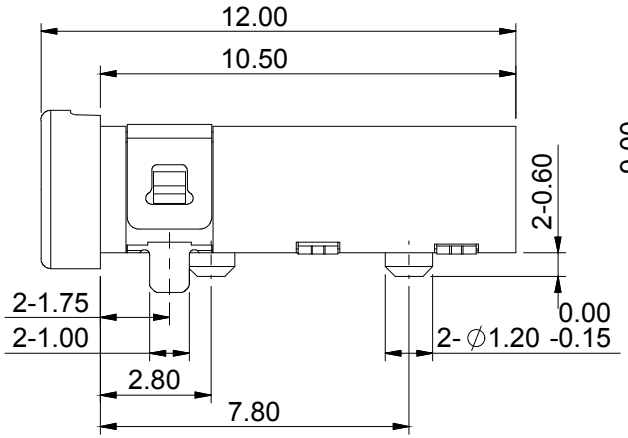


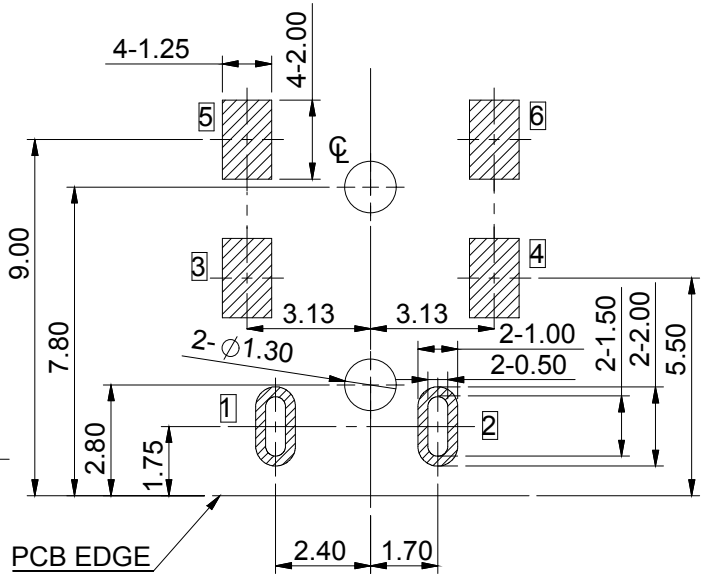


RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE ±0.05)

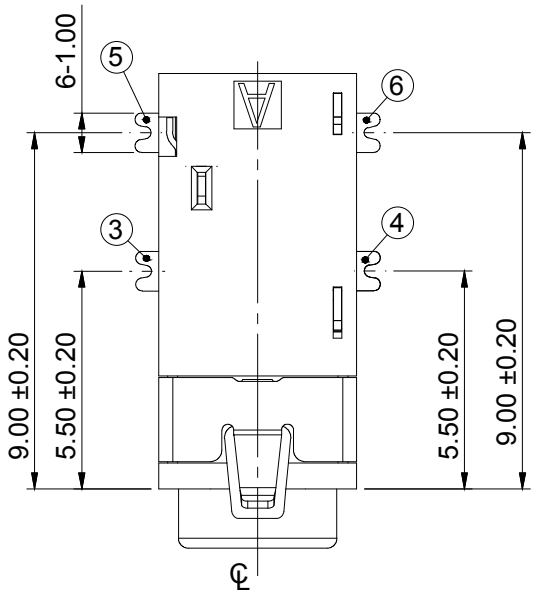

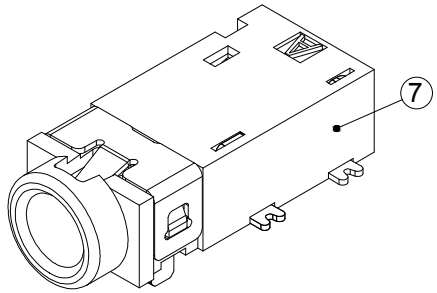

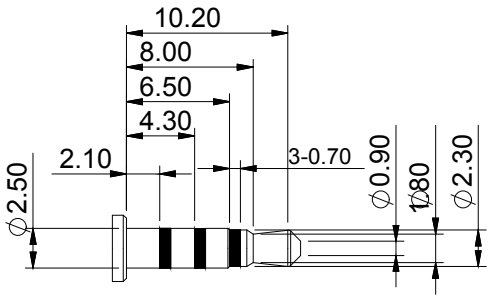

(∅2.50mm 4 POLE PLUG DETAIL DRAWING)



SCHEMATIC

NOTES:
1.CONTACT CURRENT RATING: 1A / 12V.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES:
29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES:
2.94N(0.30Kgf) MIN.;

NO.	DESCRIPTION	MAT,L	COLOR	REMARK
7	HOUSING	HIGH TEMP	BLACK	———
6	TERMINAL6	COPPER ALLOY	———	Au PLATED
5	TERMINAL5	COPPER ALLOY	———	Au PLATED
4	TERMINAL4	COPPER ALLOY	———	Au PLATED
3	TERMINAL3	COPPER ALLOY	———	Au PLATED
2	TERMINAL2	COPPER ALLOY	———	Au PLATED
1	TERMINAL1	COPPER ALLOY	———	Au PLATED

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
———	A	06/11/'18	NEW	Liu Miao	DAVID

Angle ±2°
X ±0.30
.X ±0.25
.XX ±0.20
GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

DESIGN	Liu Miao	06/11/'18
CHECK	SIMON	06/11/'18
APPRO.	DAVID	06/11/'18

CUSTOMER COPY

WFD CONN 深圳市旺富达电子有限公司
Shenzhen WFD Electronics Co.Ltd..

TITLE: ∅2.50mm PHONE JACK CONN.

PART NO.	MPJ-06C25-06-G-030
PRODUCT SPEC.	
D ING FILE NAME.	J201-4
SCALE 5:1	UNIT:mm A4 SHEET: 1 of 1