



**RoHS** Compliant | **Halogen Free**


Notes:
1.Current Rating: 12V&1A max.
2.Contact Resistance: 50mOhms Max.(intial)
3.Insulation Resistance: 100M Ohms Min./500V DC
4.Dielectric Withstanding Voltage: 500V AC/1Minute
5.Mating Force: 35N Max, Withdrawal Force: 3N Min.
6.Durability: 5,000 Cycles
7.Operating Temperature:−25°C to+85°C

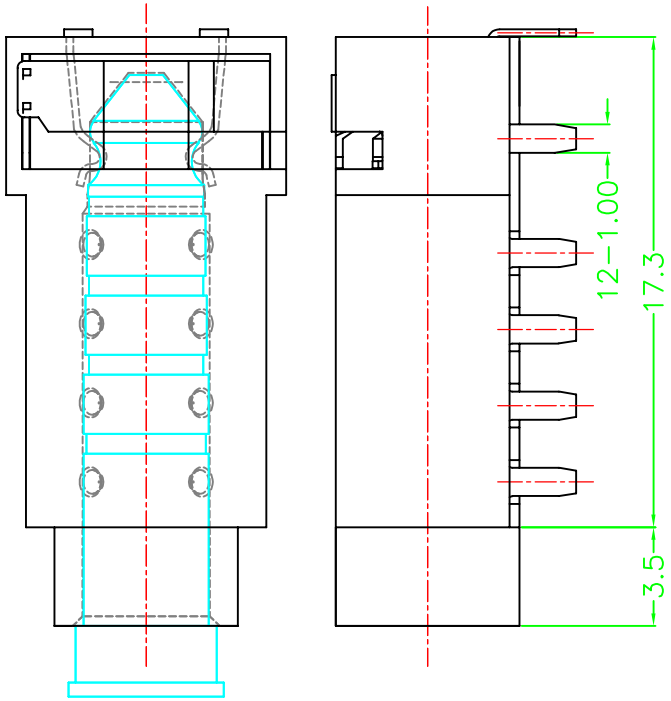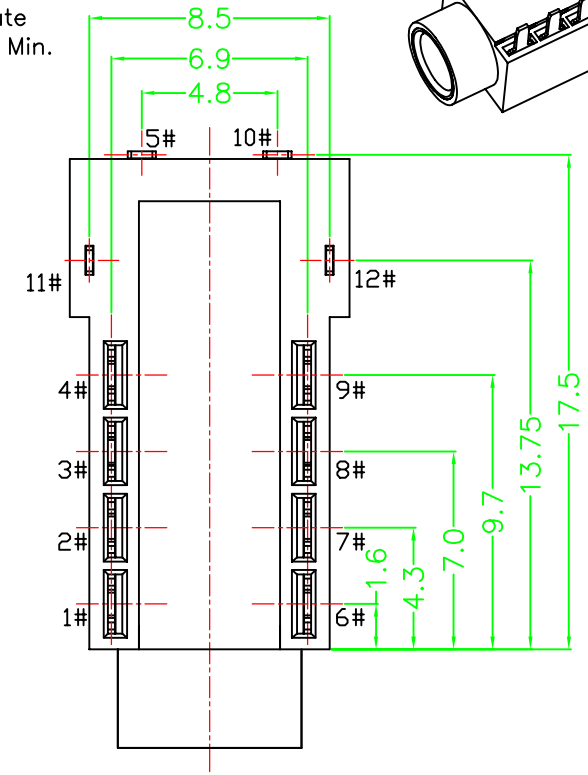


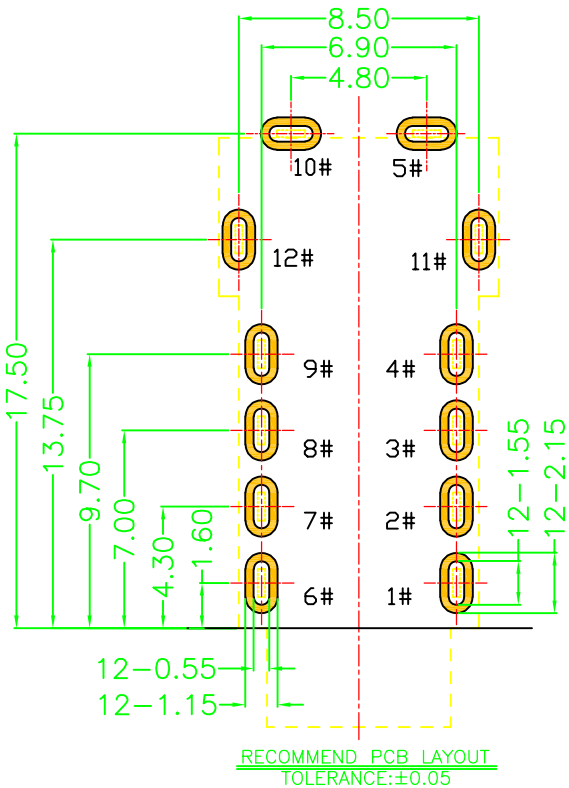


| Item | Name | Material | Description |
|---|---|---|---|
| 15 | Sleeve | Copper Alloy | G/F Plated Overall. |
| 14 | Separator | Thermoplastics | Black UL 94−V0 |
| 13 | Housing | | |
| 12 | Switch−B(+) | Stainless Steel | G/F On Contact Area & Solder Tails Ni Plated Overall. |
| 11 | Switch−A(−) | | |
| 5/10 | Left+ Contact | Copper Alloy | |
| 4/9 | Right+ Contact | | |
| 3/8 | Left− Contact | | |
| 2/7 | Right− Contact | | |
| 1/6 | GND Contact | | |

UNLESS OTHERWISE, GENERAL TOLERANCE:
X.xx ±0.15
X.x ±0.20
X. ±0.30
ANGULAR:
X.x ±1°
X. ±2°

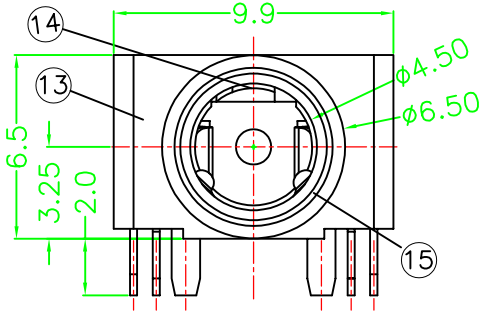WFDCONN 深圳市旺富达电子有限公司 Shenzhen WFD Electronics Co.Ltd..

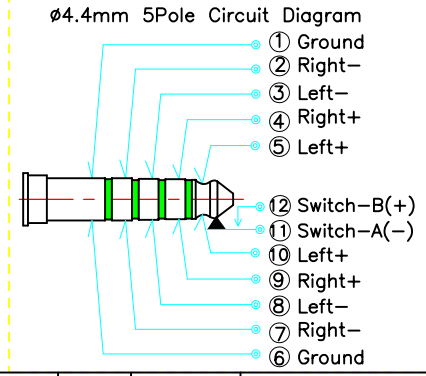TITLE: ø4.4mm 5Pole Audio Jack H6.0mm 12Pin W/Switch(Norma Close)

P/N: MPJ-12C45-12-G-032
MODEL:
DRAW NO.:

THIRD ANGLE PROJECTION | UNIT: mm | SCALE: 1:1 | SIZE: A4 | SHEET: 1/1

| ECN NO. | REV. | DESCRIPTION | DATE | CHANGE |
|---|---|---|---|---|
| | | | | |

| | | |
|---|---|---|
| DESIGN | Liu Miao | 2020.07.10 |
| CHECK | SIMON | 2020.07.10 |
| APPROVAL | DAVID | 2020.07.10 |