




SYMBOL	REVISION	APPROVAL	DATE
A		DAVID	2021.02.10

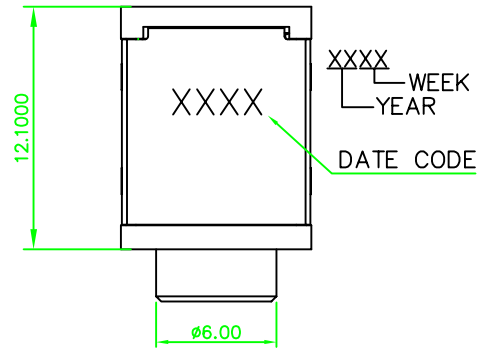


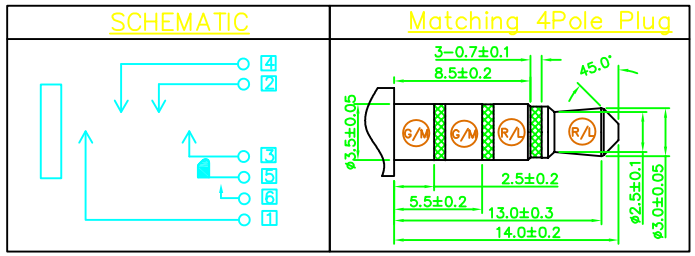




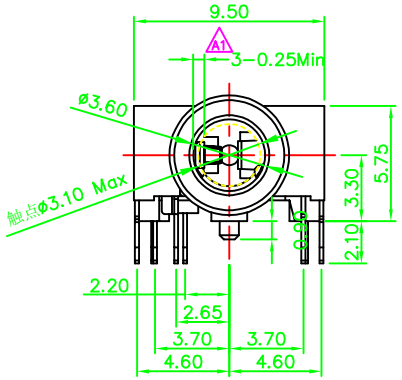


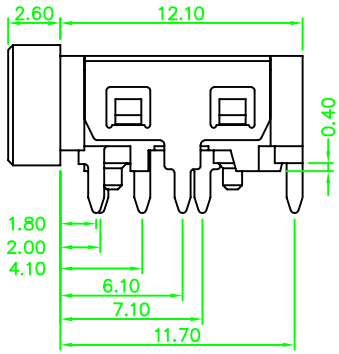



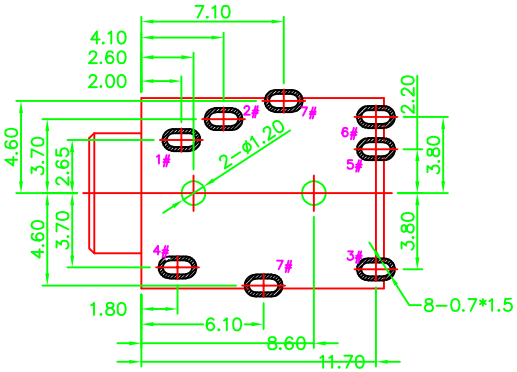

P.C.B LAYOUT TOP VIEW

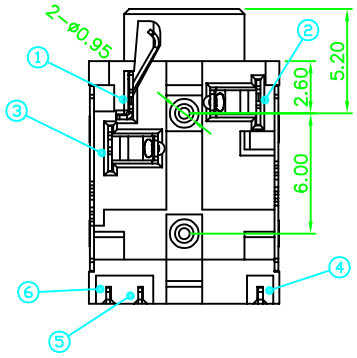

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: ≤30mΩ;
3. Insulation resistance: ≥100MΩ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles。

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
9	HOUSING	1	PA9T	BLACK
8	INSULATER	1	PA9T	BLACK
7	SHELL	1	SUS301 T=0.20mm	Ni-PLATING
6	TERMINAL-6	1	COPPER ALLOY T=0.20mm	GOLD FLASH ALL. OVER Ni40U"
5	TERMINAL-5	1	COPPER ALLOY T=0.20mm	
4	TERMINAL-4	1	COPPER ALLOY T=0.25mm	
3	TERMINAL-3	1	COPPER ALLOY T=0.20mm	
2	TERMINAL-2	1	COPPER ALLOY T=0.20mm	
1	TERMINAL-1	1	COPPER ALLOY T=0.20mm	

UNLESS OTHERWUSE SOECIFIED
DIMENSION ARE IN CENTIMETERs
TOLERANCE ARE :
FRACTION DECIMALs ANGLEs
.X ± 0.3 X' ±5'
.XX ± 0.2 .X' ±3'
.XXX ± 0.1 .XX' ±1'

3rd ANGLE PROJECTION

SCALE 1:1 UNIT mm SIZE A4

WFDCONN 深圳市旺富达电子有限公司
Shenzhen WFD Electronics Co.Ltd..

APPROVALS		DATE
DRAWN	Liu Miao	2021/02/10
CHECKED	SIMON	2021/02/10
APPROVED	DAVID	2021/02/10

TITLE: 3.5mm 4PORT AUDIO JACK

PART NO. MPJ-08C36-08-G-033